



Consolidated

Pressure Relief Valves



19000 Series

Consolidated® Safety Relief Valve





Table of Contents

Conversion Table	19000.2
Features & Benefits	19000.3
19000 Standard Valves	19000.3
19000 Soft Seats (DA)	19000.4
19096MBP	19000.6
Scope of Design	19000.7
Materials	19000.10
19000 Metal Seat Valve	19000.10
19000DA	19000.12
19000DA-MBP	19000.12
Corrosive Service Materials	19000.14
O-Ring Selection Procedure	19000.21
Dimensions & Weights	19000.23
Threaded Connections	19000.23
Socket Weld Connections	19000.24
Flanged Connections	19000.29
Pressure/ Temperature	19000.39
Capacities	19000.42
Air	19000.42
Saturated Steam	19000.44
Water	19000.45
Valve Configuration Code	19000.46
How to Order a 19000 Safety Relief Valve	19000.49



Conversion Table

All the USCS values are converted to Metric values using the following conversion factors:

USCS Unit	Conversion Factor	Metric Unit
in.	25.4	mm
lb.	0.4535924	kg
in ²	6.4516	cm ²
ft ³ /min	0.02831685	m ³ /min
gal/min	3.785412	L/min
lb/hr	0.4535924	kg/hr
psig	0.06894757	barg
ft lb	1.3558181	Nm
°F	5/9 (°F-32)	°C



Product Variation	Description
19000	Conventional Design
19000-DA	Soft Seat Design
19096MBP	Backpressure Design

Features & Benefits

19000 Standard Valves

The 19000 Series valves are designed and manufactured in compliance with ASME B & PVC, Section VIII and Section III (Class I, II and III) as well as being CE compliant to the European Pressure Equipment Directive 97/23/EC. Seat tightness, blowdown and capacity on all types of media meets the industry needs for overpressure protection in chemical, petrochemical, refinery, power generation (nuclear and conventional) and other commercial applications.

INLET SIZES	.5" (12.7 mm) through 2" (50.8 mm)
INLET RATINGS	ANSI Class 150 through 2500
OUTLET SIZES	1" (25.4 mm) through 2.5" (63.5 mm)
OUTLET RATINGS	ANSI Class 150 and 300
ORIFICE SIZES	Six sizes: 0.096 in ² to 0.567 in ² (0.619 cm ² to 3.658 cm ²)
TEMPERATURE RANGE	-450°F (-267.8°C) to 1100°F (593.3°C)
MATERIALS	316 stainless steel trim is standard.
CERTIFICATION	ASME B & PVC, Section II - Material (Applicable as required by ASME B & PVC, Section III or VIII) ASME B & PVC, Section III, class 2 and 3 (Gas, Vapor, and Liquid Service) ASME B & PVC, Section VIII (Gas, Vapor, and Liquid Service) ASME B16.34 and ASME B16.5 API 520, 526 and 527 ISO 4126 NACE MR0103-2003 Standard Material Requirements

Features & Benefits (Contd.)

19000 Soft Seats (DA)



Features

- Leak tight seats
- Tight seats at high operating pressures
- Simple replacement of soft seat
- Large selection of soft seat materials
- Soft seats are in standard O-Ring sizes
- Proven seat design

Benefits

- Potential loss of system pressure and process media reduced
- Maximizes process efficiency and product output
- Reduces maintenance costs
- Suitable for varied process applications
- Replacement seats readily available
- Dependable performance

Applications

The O-Ring design can be used for improved product performance in the same manner as that stated for the 1900 Flanged Series.

Sour Gas (SG) or NACE applications

The 19000(DA) valve materials are standard except for the spring which will be Inconel X750.

Percent of set pressure (popping pressure) at which valve will be bubble tight on air.		
Set Pressure		Percent of Set Pressure
psig	barg	
5 to 30	0.34 to 2.07	90%
31 to 50	2.14 to 3.45	92%
51 to 100	3.52 to 6.89	94%
101 to max. rating of valve	6.96 to max. rating of valve	97%


Consolidated® O-Ring seat seals provide positive seat tightness at service pressures closer to the set pressure than is possible with metal-to-metal seats assuring continuous, trouble-free service, and complete valve closure after numerous "pops".

Features & Benefits (Contd.)

19000 Soft Seats (DA)


Valve in Closed Position

- 90% of set pressure
Metal seat contains media
No leakage - bubble tight




Valve at Greater than 90% of set pressure

- Metal seats separate
- System pressure acts on O-Ring, pressure forces the O-Ring against the lip of the nozzle and curved recess of the disc holder. As the pressure within the valves rises to the set point, the O-Ring is pressed tightly against the nozzle to maintain maximum sealing force until break-away pressure is reached.
- Bubble tight seat to 97% of set pressure

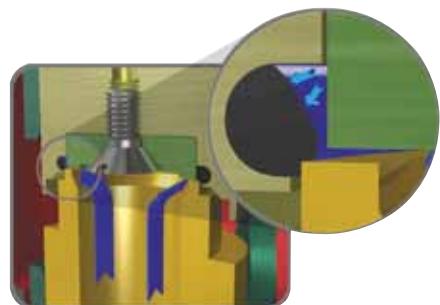


Valve Flowing

- Full lift
- Flowing rated capacity
- O-Ring is protected from blowouts as the encapsulating retainer prevents the O-Ring from being pulled from its seat by the high velocity, low pressure discharge inside the valve.



Valve Returns to Closed Position

- 90% of set pressure
Metal seat contains media
No leakage - bubble tight
- Seat tightness maintained at pressures above 90% after initial closure



Features & Benefits (Contd.)

19096MBP


The 19096MBP Series balanced design safety relief valve provides back pressure compensation characteristics that meet the needs of various plant operating systems in today's industrial markets. This design is in compliance with ASME B & PVC, Section VIII requirements. The 19096MBP's versatile design is for use in both compressible and incompressible services.

Features and Benefits

Blowdown performance is typically less than 7% on compressible fluids and typically 15% for fixed blowdown on incompressible applications. This performance minimizes the loss of process fluids during an overpressure excursion and assists in the reduction of operating costs.

An O-Ring seat design provides for leak-tight seals during normal system operation and after cycling during a pressure-relieving mode. Media loss due to seat leakage is eliminated, resulting in savings from the cost of lost product.

A simple design that is easily maintained contributes to reduced maintenance costs and parts inventory.

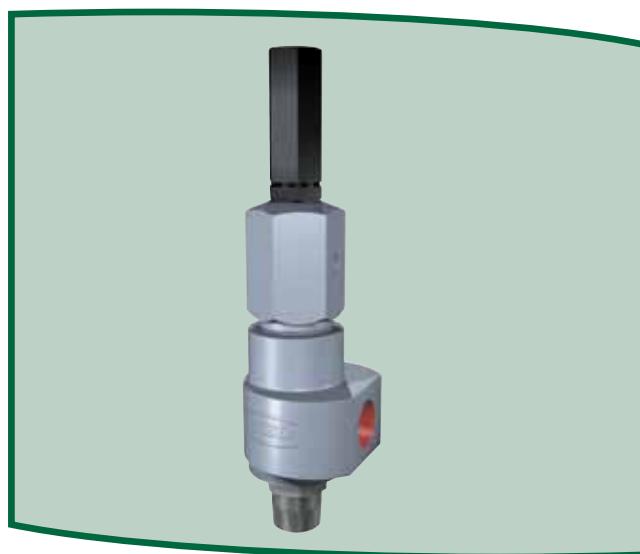

Versatile Service Conditions

- Compressible and incompressible media
- Upper spring chamber not exposed to process media
- Corrosion resistant stainless steel trim
- Special alloy construction available

Increased Operating Efficiency

- Soft seat design provides maximum seat tightness
- Reduces product loss due to leakage
- Consistent fixed blowdown

19096MBP Performance Criteria

Specific Criteria	Valve Attribute
Typical blowdown as a percent of set pressure (At the low end of the spring range with the maximum allowed back-pressure applied, the blowdown is shortest)	Liquid: 6% to 20% Gas: 3% to 16%
Allowable total backpressure (This is the sum of the variable and constant backpressure, superimposed and built-up)	Liquid: 70% of set pressure (Thermal relief applications may be supplied with backpressure up to 90% of set pressure) (Note 1) Gas: 50% of set pressure. (Note 1)
Temperature limits – Determined by o-ring material selection	Minimum : 60°F (-51°C) Maximum: 600°F (315°C)
Seat Tightness	Set pressure range 50 psig (3.45 barg) to 100 psig (6.8 barg): 94% Set pressure range 101 psig (6.9 barg) to maximum rating: 97%

Notes:

1. Total backpressure for liquid or gas shall not exceed 400 psig (27.58 barg)


19000MBP General Features

Orifice	Pressure Range		Standard Valve			Standard Connections				
			Size		Type	Inlet Size		Inlet Type	Outlet Size	
0.096 in ² (0.619 cm ²)	50 to 2000	3.45 to 137.90	.50	12.7		.50	12.7	MNPT	1.00	25.4
			.75	19.1	19096M-BP	.75	19.1	MNPT	1.00	25.4
						.75	19.1	FNPT	1.00	25.4
			1.00	25.4	19096M-BP	1.00	25.4	MNPT	1.00	25.4
								FNPT		

Scope of Design


19000 Standard Valves

19000-2 Male NPT Inlet

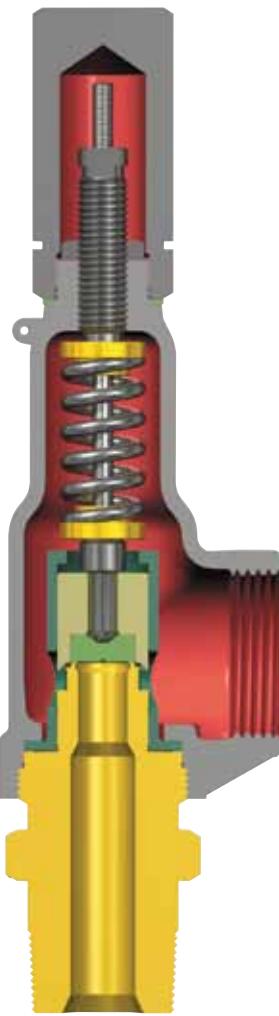

19096L, 19110L, 19126L, 19226L,
19096M, 19110M, 19126M,
19226M

19000-2 Female NPT Inlet

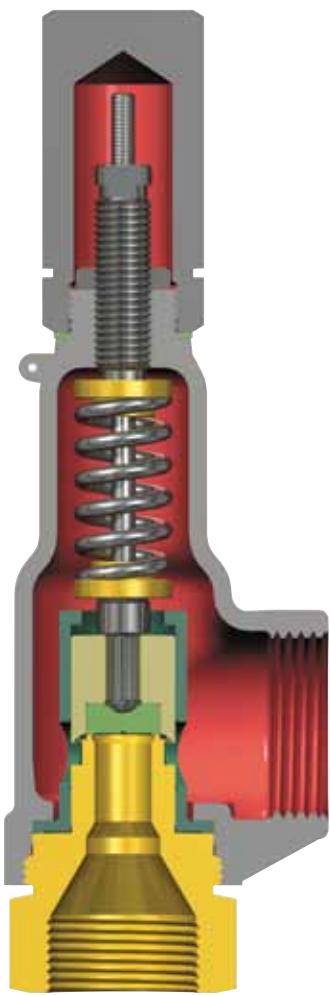

19096L, 19110L, 19126L, 19226L,
19357L, 19567L, 19096M, 19110M,
19126M, 19226M, 19357M, 19567M,
19096H, 19110H, 19126H, 19226H

General Information

The 19000 Series threaded safety relief valve has 316 stainless steel trim as standard material. Reliable performance and easy maintenance procedures are characteristics of this valve (when properly installed in suitable applications for its design).

The 19000 Series valves has three pressure classes, 19000L [5 through 290 psig (0.34 through 19.99 barg)], 19000M [291 through 2000 psig (20.06 through 137.9 barg)], and 19000H [2001 psig (137.96 barg) and up]. Standard 19000 parts are

used for both liquid applications and gas applications. It is designed for short blowdown on all medias, typically less than 10%.

All 19000 Series valves have fixed blowdown. This means that the parts are designed so that there is no blowdown adjustment required when setting or testing the valve.

Scope of Design (Contd.)

19000 Standard Valves

Design Options

a. O-Ring seat seal valves

All 19000 Series valves are available with an O-Ring seat seal, as a design option. This optional design provides a bubble tightness in excess of 97% of the valve set pressure, in order to meet application requirements beyond the normal capabilities of metal to metal seat valves. 19000 Series valves with the O-Ring seat seal option are identified by the suffix DA (e.g., 1-19096L-DA).

b. Lifting Levers, Caps and Gags

All 19000 Series valves are designed so that field conversion from the standard screwed cap to a plain lifting lever cap, or to a packed lifting lever cap (or vice versa) does not require valve assembly during resetting. The lifting lever option is designed to open the valve at 75% of the valve set pressure, in compliance with ASME B & PVC, Section VIII. Further, all available 19000 Series valve caps may be equipped with a gag, upon customer request.

c. Inlet/Outlet Connections

All 19000 Series valves can be provided by Consolidated with flanges, threaded or socket weld inlet/outlet connections upon customer request.

This product is normally supplied with threaded inlet and outlet connections. Socket weld or flanged end connections are available as well.

Product type designations change depending on connection sizes, orifice sizes, pressure range, and whether connections are male or female.

Unless otherwise specified, the valve is always supplied with a screwed cap. The exception to this would be where ASME requires levers for steam, air and water service over 140°F (60°C). Springs of precipitation hardened stainless steel are specified for -75°F to 800°F (-59°C to 426.6°C) and the valves carry a "c" suffix in that case. Inconel springs are used for temperatures 801 to 1100°F (427.2 to 593.3°C) and the valve carries a "t" suffix.

When selecting valves for back pressure applications, the following limits apply.

- Constant back pressure: 400 psig (27.58 barg) max.
- Variable back pressure (superimposed or built-up): 400 psig (27.58 barg) or 10% of set pressure whichever is smaller.

Product variations consist of:

- 19000SG - Sour Gas Trim
- 19000DA - Soft Seat
- 19000MBP - Back Pressure Compensation

Product material variations include:

- 316 Stainless Steel
- Monel
- Hastelloy
- Alloy 20

Notes:

- 1 Pressure/Temperature ratings may vary from those for standard valves when other than standard materials are selected. Consult factory for assistance.

19000SG (Sour Gas)

The standard 19000 valve has component materials selected which comply with NACE MR-01-75 requirements (except the valve spring). To fully comply with MR-01-75, utilize the standard valve and specify an Inconel X750 spring. When service temperature exceeds 250°F (121°C) an Inconel X750 disc will be the standard component material meeting

the requirements of MR-01-75. Under 250°F (121°C) the standard component material for the disc is 316SS.

The Inconel X750 disc, Inconel X750 disc holder, Stellite® faced base and Inconel X750 spindle used in high pressure valves will meet the requirements of MR-01-75 when supplied with an Inconel X750 spring.

19000MBP


Scope of Design	
Inlet Sizes	.5" (12.7 mm) through 1" (25.4 mm) in either threaded, socket weld or 1" (25.4) flanged design
Outlet Sizes	1" (25.4 mm) threaded, socket weld or flanged design
Orifice Size	0.096 in ² (0.619 cm ²)
Set Pressure Range	50 psig to 2000 psig (3.45 to 68.95 barg)
Temperature Range	-60°F to 600°F (-51°C to 315°C)
Certification	ASME B & PVC, Section VIII
Backpressure	400 psig (27.58 barg) - Variable and/or Constant

Scope of Design (Contd.)

Standard Inlet/Outlet Connections and Pressure Classes												
Orifice		Pressure Range				Valve Type	Inlet			Outlet		
in ²	cm ²	psig		barg			Size	Type	Size		Type	
		min	max	min	max				in	mm		
0.096	0.619	5	290	0.34	19.99	19096L	.50	MNPT	1.00	25.4	FNPT	
							.75	MNPT	1.00	25.4	FNPT	
							.75	FNPT	1.00	25.4	FNPT	
							1.00	MNPT	1.00	25.4	FNPT	
							.50	12.70	MNPT	1.00	25.4	FNPT
		291	2000	20.06	137.90	19096M	.75	MNPT	1.00	25.4	FNPT	
							.75	FNPT	1.00	25.4	FNPT	
							1.00	MNPT	1.00	25.4	FNPT	
							.75	FNPT	1.00	25.4	FNPT	
							.50	12.70	MNPT	1.00	25.4	FNPT
0.096 BP	0.619	50	2000	3.45	137.90	19096M-BP	.75	MNPT	1.00	25.4	FNPT	
							.75	FNPT	1.00	25.4	FNPT	
							1.00	MNPT	1.00	25.4	FNPT	
							.50	12.70	MNPT	1.00	25.4	FNPT
							.75	19.05	MNPT	1.00	25.4	FNPT
		291	2000	20.06	137.90	19110M	.75	19.05	MNPT	1.00	25.4	FNPT
							.75	FNPT	1.00	25.4	FNPT	
							1.00	MNPT	1.00	25.4	FNPT	
							.75	19.05	MNPT	1.00	25.4	FNPT
							.75	FNPT	1.00	25.4	FNPT	
0.110	0.710	5	290	0.34	19.99	19110L	.50	MNPT	1.00	25.4	FNPT	
							.75	MNPT	1.00	25.4	FNPT	
							.75	FNPT	1.00	25.4	FNPT	
							1.00	MNPT	1.00	25.4	FNPT	
							.50	12.70	MNPT	1.00	25.4	FNPT
		291	2000	20.06	137.90	19110M	.75	19.05	MNPT	1.00	25.4	FNPT
							.75	FNPT	1.00	25.4	FNPT	
							1.00	MNPT	1.00	25.4	FNPT	
							.75	19.05	MNPT	1.00	25.4	FNPT
							.75	FNPT	1.00	25.4	FNPT	
0.126	0.813	5	290	0.34	19.99	19126L	.75	MNPT	1.00	25.4	FNPT	
							1.00	25.40	MNPT	1.00	25.4	FNPT
							.75	19.05	MNPT	1.00	25.4	FNPT
		291	2000	20.06	137.90	19126M	.75	FNPT	1.00	25.4	FNPT	
							1.00	MNPT	1.00	25.4	FNPT	
							.75	19.05	MNPT	1.00	25.4	FNPT
							.75	FNPT	1.00	25.4	FNPT	
							1.00	25.40	MNPT	1.00	25.4	FNPT
0.226	1.458	5	290	0.34	19.99	19226L	1.00	25.40	MNPT	1.50	38.1	FNPT
							1.00	25.40	FNPT	1.50	38.1	FNPT
							1.00	25.40	MNPT	1.50	38.1	FNPT
							1.00	25.40	FNPT	1.50	38.1	FNPT
		291	2000	20.06	137.90	19226M	1.00	25.40	MNPT	1.50	38.1	FNPT
							1.00	25.40	FNPT	1.50	38.1	FNPT
							1.00	25.40	MNPT	1.50	38.1	FNPT
							1.00	25.40	FNPT	1.50	38.1	FNPT
0.357	2.303	5	290	0.34	19.99	19357L	1.50	38.10	FNPT	2.00	50.8	FNPT
							1.50	38.10	FNPT	2.00	50.8	FNPT
		291	1500	20.06	103.42	19357M	1.50	38.10	FNPT	2.00	50.8	FNPT
							1.50	38.10	FNPT	2.00	50.8	FNPT
0.567	3.658	5	290	0.34	19.99	19567L	2.00	50.80	FNPT	2.50	63.5	FNPT
							2.00	50.80	FNPT	2.50	63.5	FNPT
		291	1000	20.06	68.95	19567M	2.00	50.80	FNPT	2.50	63.5	FNPT

Materials

19000 Metal Seat Valve

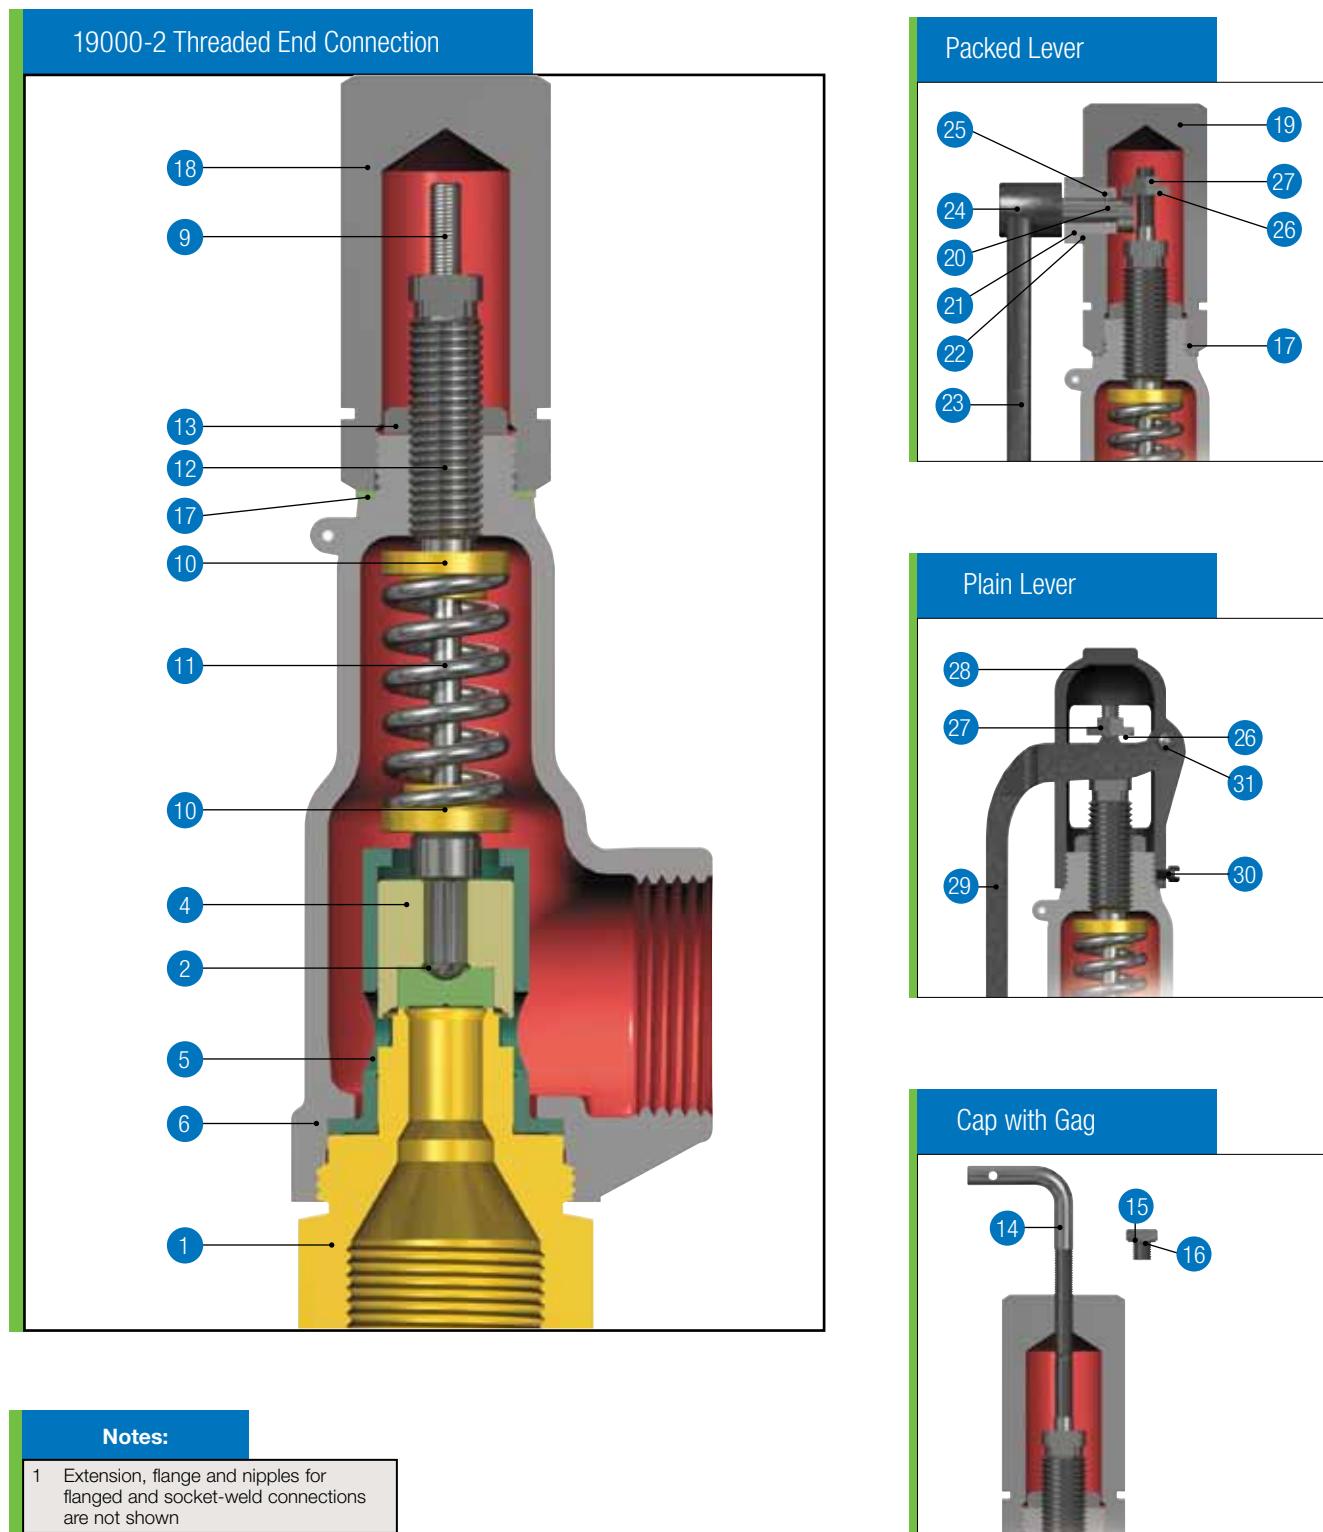

Materials (Contd.)

19000 Metal Seat Valve (Contd.)

19000 Metal Seat Valve - Std. Materials		
Ref. No.	Part	Material (-CC)
1	Base	
	19000L	ASME SA479 316 St. St.
	19000M	ASME SA479 316 St. St.
	19000H	ASME SA479 316 St. St. ¹
2	Disc	
	19000L & M	316 Stainless Steel
	19000L & M (Steam) ²	616 Stainless Steel
	19000H	Inconel X-750
4	Disc Holder	
	Metal Seat 19000L	316 Stainless Steel
	Metal Seat 19000M	316 Stainless Steel
	Metal Seat 19000H	316 Stainless Steel
5	Guide	316 Stainless Steel
6	Bonnet	ASME SA216 WCC CS
9	Spindle	
	Metal Seat 19000L	316 Stainless Steel
	Metal Seat 19000M	316 Stainless Steel
	Metal Seat 19000H	Inconel X-750
10	Spring Washer	Carbon Steel
11	Spring	
	19000Lc	17-7 PH Stainless Steel
	19000Lt	Inconel X-750
	19000Mc	17-7 PH Stainless Steel
	19000Mt	Inconel X-750
	19000Hc	17-7 PH Stainless Steel
	19000Ht	Inconel X-750
12	Adjusting Screw	316 Stainless Steel
13	Adjusting Screw Locknut	316 Stainless Steel
14	Gag Bolt	Carbon Steel
15	Sealing Plug	Carbon Steel
16	Sealing Plug Gasket	Soft Iron
17	Cap Gasket	Soft Iron
18	Screwed Cap	Carbon Steel
19	Packed Cap	Carbon Steel
20	Cam Shaft	410 Stainless Steel
21	Bushing	416 Stainless Steel
22	Bushing Gasket	Soft Iron
23	Packed Lifting Lever	Malleable Iron
24	Drive Pin	Steel (Ni-Plated)
25	O-Ring	Viton 70
26	Release Nut	Carbon Steel
27	Release Locknut	Carbon Steel
28	Plain Lever Cap	Malleable Iron
29	Plain Lifting Lever	Malleable Iron
30	Cap Screw	Carbon Steel
31	Lever Pin	Carbon Steel
32	Inlet Extension (Not Shown)	316 Stainless Steel
33	Inlet Flange (Not Shown)	ASME SA105 Carbon Steel
34	Outlet Extension (Not Shown)	316 Stainless Steel
35	Outlet Flange (Not Shown)	ASME SA105 Carbon Steel
41	Inlet Nipple Extension (Optional)	316 Stainless Steel
42	Outlet Nipple Extension (Optional)	Carbon Steel

Notes:


- 1. Stellite or Equivalent Seats.
- 2. Supplied for steam service at and above 251°F (122°C).

Sour Gas (SG) or NACE applications


The 19000 valve materials are standard except for the spring, which will be Inconel X750, and for service temperatures that exceed 250°F (121°C), an Inconel X750 disc will be provided.

Materials (Contd.)


19096-MBP

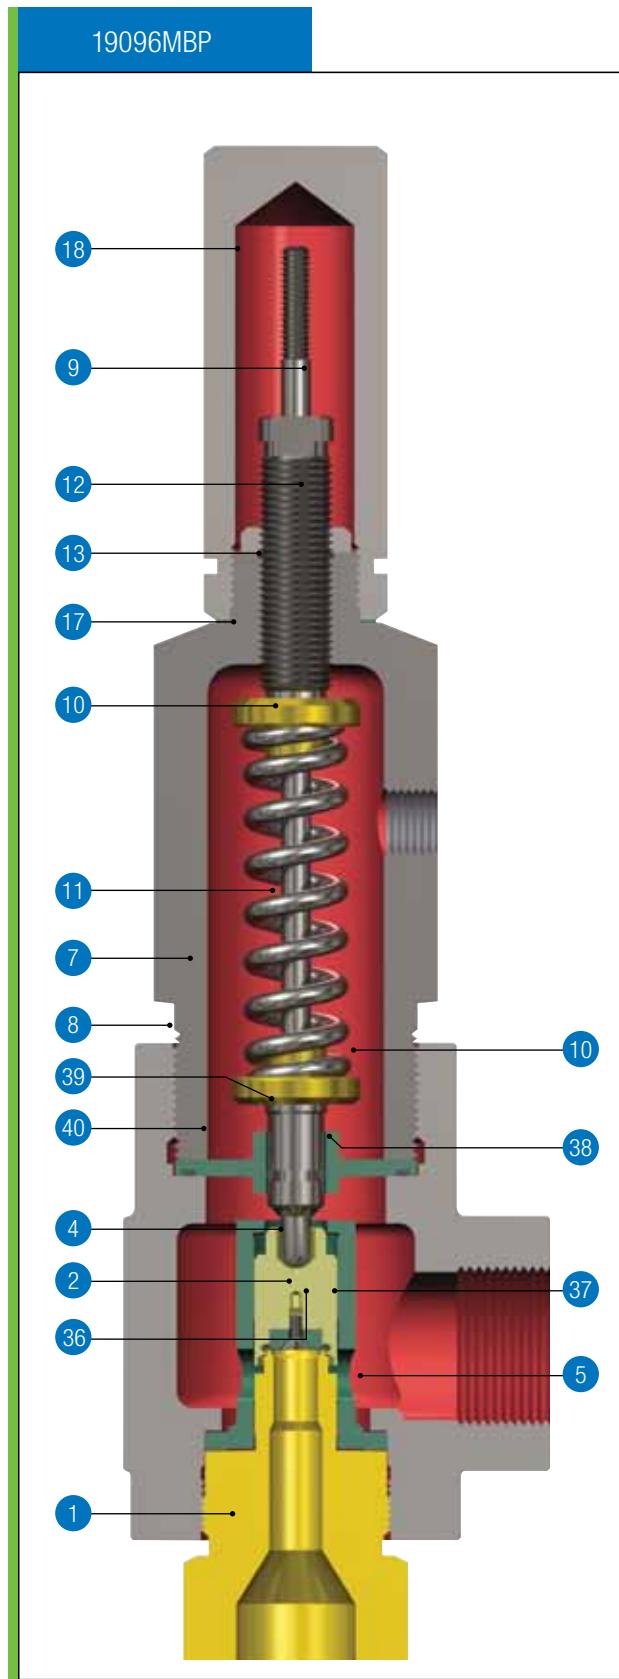


19000DA

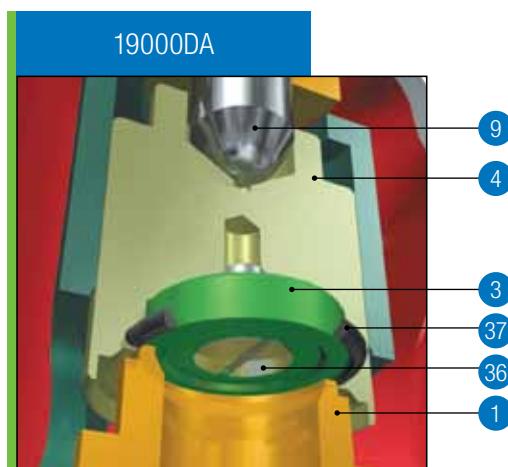

Plain Lever

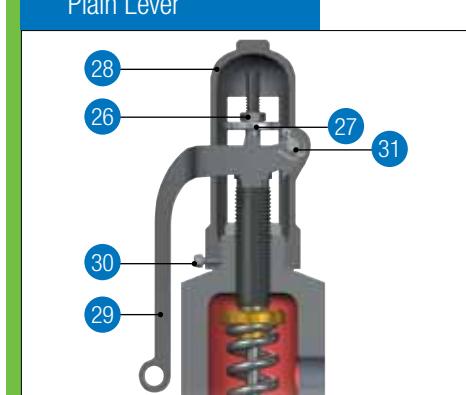

Cap with Gag

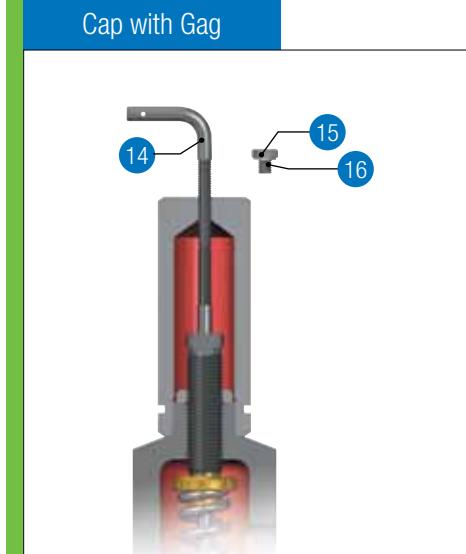

Materials (Contd.)

19096-MBP

19096-MBP - Std. Materials			Sour Gas (SG) or NACE applications				
Ref. No.	Part	Material (-CC)	Soft Seat Material Temp. Limits				
			Material	Temperature Limits			
				°F	°C	min.	max.
1	Base		Nitrile	-45	+300	-43	+149
	19000L	ASME SA479 316 St.St.	Ethylene/Propylene	-70	+500	-57	+260
	19000M	ASME SA479 316 St.St.	Fluoro-Carbon	-15	+400	-26	+204
	19000H	ASME SA479 316 St.St. ¹	Fluoro-Silicone	-100	+350	-73	+177
3	O-Ring Retainer		Neoprene	-45	+300	-43	+149
	19000L	316 Stainless Steel	Silicone	-65	+437	-54	+225
	19000M	316 Stainless Steel	Teflon	-300	+505	-184	+263
4	Disc Holder						
	19000L	316 Stainless Steel					
	19000M	Inconel X-750					
	19000H	Inconel X-750					
5	Guide	316 Stainless Steel					
7	Bonnet Top	ASME SA105 Carbon Steel					
8	Bonnet Bottom	ASME SA105 Carbon Steel					
9	Spindle						
	19000L	316 Stainless Steel					
	19000M	Inconel X-750					
	19000H	Inconel X-750					
10	Spring Washer	Carbon Steel					
11	Spring						
	19000Mc	17-7 PH Stainless Steel					
	19000Mt	Inconel X-750					
12	Adjusting Screw	316 Stainless Steel					
13	Adj. Screw Locknut	316 Stainless Steel					
14	Gag Bolt	Carbon Steel					
15	Sealing Plug	Carbon Steel					
16	Sealing Plug Gasket	Soft Iron					
17	Cap Gasket	Soft Iron					
18	Screwed Cap	Carbon Steel					
26	Release Nut	Carbon Steel					
27	Release Locknut	Carbon Steel					
28	Plain Lever Cap	Malleable Iron					
29	Plain Lifting Lever	Malleable Iron					
30	Cap Screw	Carbon Steel					
31	Lever Pin	Carbon Steel					
32	Inlet Extension (Not Shown)	316 Stainless Steel					
33	Inlet Flange (Not Shown)	ASME SA105 Carbon Steel					
34	Outlet Extension (Not Shown)	316 Stainless Steel					
35	Outlet Flange (Not Shown)	ASME SA105 Carbon Steel					
36	O-Ring Retainer Lockscrew	316 Stainless Steel					
37	O-Ring Seat Seal	Select					
38	Spindle O-Ring	Same as O-Ring Seat Seal ²					
39	Backup Plate	316 Stainless Steel					
40	Backup Plate O-Ring	Same as O-Ring Seat Seal					
41	Inlet Nipple Extension (Optional)	316 Stainless Steel					
42	Outlet Nipple Extension (Optional)	Carbon Steel					

Notes:

1. Stellite or Equivalent Seats.
2. Not to be Teflon.

Materials (Contd.)

Corrosive Service Materials

Stainless Material Variations (Standard & Backpressure Design)			
Part	Stainless Steel Valve Construction		
	S2	S3	S4
Base			
19000L, 19000M	ASME SA479 316 St. St.	ASME SA479 316 St. St.	ASME SA479 316 St. St.
19000H	ASME SA479 316 St. St. ¹	ASME SA479 316 st. St. ¹	ASME SA479 316 St. St. ¹
Disc (MS)			
19000L & M	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
19000L & M (Steam) ²	616 Stainless Steel	616 Stainless Steel	616 Stainless Steel
19000H	Inconel X-750	Inconel X-750	Inconel X-750
O-Ring Retainer (DA & BP)			
19000L, 19000M	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
19000H	Inconel X-750	Inconel X-750	Inconel X-750
Disc Holder (BP-Soft Seat Only)			
Metal Seat; 19000L, 19000M, 19000H, Soft Seat; 19000L	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Soft Seat; 19000M, 19000H	Inconel X-750	Inconel X-750	Inconel X-750
Guide, Outlet Extension			
	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Bonnet (DA & MS)	ASME SA216 WCC CS	ASME SA351 CF8M St. St.	ASME SA351 CF8M St. St.
Bonnet Top & Bonnet Bottom (BP Only)	ASME SA105 Carbon Steel	ASME SA479 316 St. St.	ASME SA479 316 St. St.
Spindle (BP-Soft Seat Only)			
Metal Seat; 19000L, 19000M, Soft Seat; 19000L	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Metal Seat; 19000H, Soft Seat; 19000M, 19000H	Inconel X-750	Inconel X-750	Inconel X-750
Spring Washer	Carbon Steel	Carbon Steel	316 Stainless Steel
Spring (BP-19000M Only)			
19000Lc	17-7 PH Stainless Steel	17-7 PH Stainless Steel	316 Stainless Steel
19000Lt, 19000Mt, 19000Ht	Inconel X-750	Inconel X-750	Inconel X-750
19000Mc, 19000Hc	17-7 PH Stainless Steel	17-7 PH Stainless Steel	Inconel X-750
Adjusting Screw, Adj. Screw Locknut	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Gag Bolt, Sealing Plug	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Sealing Plug Gasket, Cap Gasket, Bushing Gasket	Soft Iron	Monel	Monel
Screwed Cap, Packed Cap, Cap Screw	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Cam Shaft	410 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Bushing	416 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Packed Lifting Lever	Malleable Iron	316 Stainless Steel	316 Stainless Steel
Drive Pin	Steel (Ni-Plated)	303 Stainless Steel	303 Stainless Steel
O-Ring	Viton 70	Viton 70	Viton 70
Release Nut, Release Locknut, Lever Pin	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Plain Lever Cap, Plain Lifting Lever	Malleable Iron	316 Stainless Steel	316 Stainless Steel
Inlet Extension, Inlet Nipple Extension (Optional)	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Inlet Flange	ASME SA105 Carbon Steel	ASME SA182-F316 ³	ASME SA182-F316 ³
Outlet Nipple Extension (Optional)	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Outlet Flange	ASME SA105 Carbon Steel	ASME SA182-F316 ³	ASME SA182-F316 ³
Backup Plate, O-Ring Retainer Lockscrew	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
O-Ring Seat Seal, Backup Plate O-Ring, Spindle O-Ring ⁴	Select	Select	Select

Notes:

1. Stellite or Equivalent Seats.
2. Supplied for steam service at and above 251°F (122°C).
3. or SA479-316 Stainless Steel.
4. Not to be Teflon.

Materials (Contd.)

Corrosive Service Materials (Contd.)

Monel Material Variations (Standard & Backpressure Design)					
Part	Monel Valve Construction				
	M1	MB	M2	M3	M4
Base					
19000L, 19000M	Monel	Monel	Monel	Monel	Monel
19000H	Inconel 625 ¹	Inconel 625 ¹	Inconel 625 ¹	Inconel 625 ¹	Inconel 625 ¹
Disc (MS)					
19000L & M	Monel	Monel	Monel	Monel	Monel
19000L & M (Steam) ² , 19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
O-Ring Retainer (DA & BP)					
19000L, 19000M	Monel	Monel	Monel	Monel	Monel
19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Disc Holder (BP-Soft Seat Only)					
Metal Seat; 19000L, 19000M, 19000H	316 Stainless Steel	Monel	Monel	Monel	Monel
Soft Seat; 19000L	Monel	Monel	Monel	Monel	Monel
Soft Seat; 19000M, 19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Guide	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
One Piece Bonnet (DA & MS)	ASME SA216 WCC CS	ASME SA216 WCC CS	ASME SA216 WCC CS	ASTM A494 M35-1 NiCu Alloy	ASTM A494 M35-1 NiCu Alloy
Bonnet Top & Bonnet Bottom (BP Only)	ASME SA105 CS	ASME SA105 CS	ASME SA105 CSI	ASME SB164-N04400	ASME SB164-N04400
Spindle (BP-Soft Seat Only)					
Metal Seat; 19000L, 19000M	316 Stainless Steel	316 Stainless Steel	Monel	Monel	Monel
Metal Seat; 19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Soft Seat; 19000M, 19000H					
Soft Seat; 19000L	316 Stainless Steel	316 Stainless Steel	Monel	Monel	Monel
Spring Washer	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel	Monel
Spring (BP-19000M Only)					
19000Lc, 19000Mc, 19000Hc	17-7 PH St. St.	Monel			
19000Lt, 19000Mt, 19000Ht	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Adjusting Screw, Adj. Screw Locknut	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	Monel	Monel
Gag Bolt	Carbon Steel	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Sealing Plug, Screwed Cap	Carbon Steel	Carbon Steel	Carbon Steel	Monel	Monel
Sealing Plug Gasket, Cap Gasket	Soft Iron	Soft Iron	Soft Iron	Monel	Monel
Packed Cap	Carbon Steel	Carbon Steel	Carbon Steel	N/A	N/A
Cam Shaft	410 Stainless Steel	410 Stainless Steel	410 Stainless Steel	N/A	N/A
Bushing	416 Stainless Steel	416 Stainless Steel	416 Stainless Steel	N/A	N/A
Bushing Gasket	Soft Iron	Soft Iron	Soft Iron	N/A	N/A
Packed Lifting Lever	Malleable Iron	Malleable Iron	Malleable Iron	N/A	N/A
Drive Pin	Steel (Ni-Plated)	Steel (Ni-Plated)	Steel (Ni-Plated)	N/A	N/A
O-Ring	Viton 70	Viton 70	Viton 70	N/A	N/A
Release Nut, Release Locknut	Carbon Steel	Carbon Steel	Carbon Steel	N/A	N/A
Plain Lever Cap, Plain Lifting Lever	Malleable Iron	Malleable Iron	Malleable Iron	N/A	N/A
Cap Screw, Lever Pin	Carbon Steel	Carbon Steel	Carbon Steel	N/A	N/A
Inlet Extension	Monel	Monel	Monel	Monel	Monel
Inlet Flange, Outlet Flange	ASME SA105 CS	ASME SA105 CS	ASME SA105 CS	ASME SB564 ³	ASME SB564 ³
Outlet Ext., Outlet Nipple Ext. (Optional)	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	Monel	Monel
O-Ring Retainer Lockscrew	Monel	Monel	Monel	Monel	Monel
O-Ring Seat Seal, Backup Plate O-Ring, Spindle O-Ring ⁴	Select	Select	Select	Select	Select
Backup Plate, Inlet Nipple Ext. (Optional)	Monel	Monel	Monel	Monel	Monel

Notes:

1. Stellite or Equivalent Seats.
2. Supplied for steam service at and above 251°F (122°C).
3. SB164-N04400.
4. Not to be Teflon.

Materials (Contd.)

Corrosive Service Materials (Contd.)

Hastelloy Material Variations (Standard & Backpressure Design)				
Part	Hastelloy Valve Construction			
	H1	H2	H3	H4
Base				
19000L, 19000M	Hastelloy	Hastelloy	Hastelloy	Hastelloy
19000H	Inconel 625 ¹	Inconel 625 ¹	Inconel 625 ¹	Inconel 625 ¹
Disc (MS)				
19000L & M	Hastelloy	Hastelloy	Hastelloy	Hastelloy
19000L & M (Steam) ² , 19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
O-Ring Retainer (DA & BP)				
19000L, 19000M	Hastelloy	Hastelloy	Hastelloy	Hastelloy
19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Disc Holder (BP-Soft Seat Only)				
Metal Seat; 19000L, 19000M, 19000H	316 Stainless Steel	Hastelloy	Hastelloy	Hastelloy
Soft Seat; 19000L	Hastelloy	Hastelloy	Hastelloy	Hastelloy
Soft Seat; 19000M, 19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Guide	316 Stainless Steel	Hastelloy	Hastelloy	Hastelloy
Bonnet (DA & MS)	ASME SA216 WCC Carbon Steel	ASME SA216 WCC Carbon Steel	ASME SA194 CW12MW NA ³	ASME SA194 CW12MW NA ³
Bonnet Top & Bonnet Bottom (BP Only)	ASME SA105 Carbon Steel	ASME SA105 Carbon Steel	ASME SB574-N10276	ASME SB574-N10276
Spindle (BP-Soft Seat Only)				
Metal Seat; 19000L, 19000M	316 Stainless Steel	Hastelloy	Hastelloy	Hastelloy
Metal Seat; 19000H, Soft Seat; 19000M, 19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Soft Seat; 19000L	316 Stainless Steel	Hastelloy	Hastelloy	Hastelloy
Spring Washer	Carbon Steel	Carbon Steel	Carbon Steel	Hastelloy
Spring (BP-19000M Only)				
19000Lc	17-7 PH Stainless Steel	17-7 PH Stainless Steel	17-7 PH Stainless Steel	Hastelloy
19000LT, 19000MT, 19000HT	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
19000Mc, 19000Hc	17-7 PH Stainless Steel	17-7 PH Stainless Steel	17-7 PH Stainless Steel	Inconel X-750
Adjusting Screw, Adj. Screw Locknut	316 Stainless Steel	316 Stainless Steel	Hastelloy	Hastelloy
Gag Bolt	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Sealing Plug, Screwed Cap	Carbon Steel	Carbon Steel	Hastelloy	Hastelloy
Sealing Plug Gasket, Cap Gasket	Soft Iron	Soft Iron	Monel	Monel
Packed Cap, Cap Screw, Lever Pin	Carbon Steel	Carbon Steel	N/A	N/A
Cam Shaft	410 Stainless Steel	410 Stainless Steel	N/A	N/A
Bushing	416 Stainless Steel	416 Stainless Steel	N/A	N/A
Bushing Gasket	Soft Iron	Soft Iron	N/A	N/A
Packed Lifting Lever, Plain Lifting Lever	Malleable Iron	Malleable Iron	N/A	N/A
Drive Pin	Steel (Ni-Plated)	Steel (Ni-Plated)	N/A	N/A
O-Ring	Viton 70	Viton 70	N/A	N/A
Release Nut, Release Locknut	Carbon Steel	Carbon Steel	N/A	N/A
Plain Lever Cap	Malleable Iron	Malleable Iron	N/A	N/A
Inlet Ext., Inlet Nipple Ext. (Optional)	Hastelloy	Hastelloy	Hastelloy	Hastelloy
Inlet Flange, Outlet Flange	ASME SA105 Carbon Steel	ASME SA105 Carbon Steel	ASME SB574-N10276	ASME SB574-N10276
Outlet Ext., Outlet Nipple Ext. (Optional)	316 Stainless Steel	316 Stainless Steel	Hastelloy	Hastelloy
O-Ring Retainer Lockscrew (DA & BP),	Hastelloy	Hastelloy	Hastelloy	Hastelloy
O-Ring Seat Seal Spindle O-Ring, Backup Plate O-Ring ⁴	Select	Select	Select	Select
Backup Plate (BP Only)	Hastelloy	Hastelloy	Hastelloy	Hastelloy

Notes:

1. Stellite or Equivalent Seats.
2. Supplied for steam service at and above 251°F (122°C).
3. For flanged 19000 valves, bonnets must be made from barstock ASME SB574 UNS N10276.
4. Not to be Teflon.

Materials (Contd.)

Corrosive Service Materials (Contd.)

Alloy 20 Material Variations (Standard and Backpressure Design)				
Part	Alloy 20 Valve Construction			
	A1	A2	A3	A4
Base				
19000L, 19000M	Alloy 20	Alloy 20	Alloy 20	Alloy 20
19000H	Inconel 625 ¹	Inconel 625 ¹	Inconel 625 ¹	Inconel 625 ¹
Disc (MS)				
19000L & M	Alloy 20	Alloy 20	Alloy 20	Alloy 20
19000L & M (Steam) ² , 19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
O-Ring Retainer (DA & BP)				
19000L, 19000M	Alloy 20	Alloy 20	Alloy 20	Alloy 20
19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Disc Holder (BP-Soft Seat Only)				
Metal Seat; 1900L, 1900M, 1900H	316 Stainless Steel	Alloy 20	Alloy 20	Alloy 20
Soft Seat; 19000L	Alloy 20	Alloy 20	Alloy 20	Alloy 20
Soft Seat; 19000M, 19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Guide	316 Stainless Steel	Alloy 20	Alloy 20	Alloy 20
Bonnet (DA & MS)	ASME SA216 WCC CS	ASME SA216 WCC CS	ASME SA351 CN7M	ASME SA351 CN7M
Bonnet Top & Bonnet Bottom (BP Only)	ASME SA105 Carbon Steel	ASME SA105 Carbon Steel	ASTM B473 N08020	ASTM B473 N08020
Spindle (BP-Soft Seat Only)				
Metal Seat; 1900L, 1900M, Soft Seat; 19000L	316 Stainless Steel	Alloy 20	Alloy 20	Alloy 20
Metal Seat; 1900H, Soft Seat; 19000M, 19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Spring Washer	Carbon Steel	Carbon Steel	Carbon Steel	Alloy 20
Spring (BP-19000M Only)				
19000Lc	17-7 PH Stainless Steel	17-7 PH Stainless Steel	17-7 PH Stainless Steel	Alloy 20
19000Lt, 19000Mt, 19000Ht	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
19000Mc, 19000Hc	17-7 PH Stainless Steel	17-7 PH Stainless Steel	17-7 PH Stainless Steel	Inconel X-750
Adjusting Screw, Adj. Screw Locknut	316 Stainless Steel	316 Stainless Steel	Alloy 20	Alloy 20
Gag Bolt	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Sealing Plug, Screwed Cap	Carbon Steel	Carbon Steel	Alloy 20	Alloy 20
Sealing Plug Gasket, Cap Gasket	Soft Iron	Soft Iron	Monel	Monel
Packed Cap, Cap Screw, Lever Pin	Carbon Steel	Carbon Steel	N/A	N/A
Cam Shaft	410 Stainless Steel	410 Stainless Steel	N/A	N/A
Bushing	416 Stainless Steel	416 Stainless Steel	N/A	N/A
Bushing Gasket	Soft Iron	Soft Iron	N/A	N/A
Packed Lifting Lever, Plain Lifting Lever	Malleable Iron	Malleable Iron	N/A	N/A
Drive Pin	Steel (Ni-Plated)	Steel (Ni-Plated)	N/A	N/A
O-Ring	Viton 70	Viton 70	N/A	N/A
Release Nut, Release Locknut	Carbon Steel	Carbon Steel	N/A	N/A
Plain Lever Cap	Malleable Iron	Malleable Iron	N/A	N/A
Inlet Ext., Inlet Nipple Ext. (Optional)	Alloy 20	Alloy 20	Alloy 20	Alloy 20
Inlet Flange, Outlet Flange	ASME SA105 Carbon Steel	ASME SA105 Carbon Steel	ASME SB462 ³	ASME SB462 ³
Outlet Ext., Outlet Nipple Ext. (Optional)	316 Stainless Steel	316 Stainless Steel	Alloy 20	Alloy 20
O-Ring Retainer Lockscrew (DA & BP)	Alloy 20	Alloy 20	Alloy 20	Alloy 20
O-Ring Seat Seal (DA & BP), Backup Plate O-Ring	Select	Select	Select	Select
Spindle O-Ring (BP Only) ⁴				
Backup Plate (BP Only)	Alloy 20	Alloy 20	Alloy 20	Alloy 20

Notes:

1. Stellite or Equivalent Seats.
2. Supplied for steam service at and above 251°F (122°C).
3. or SB473-N08020.
4. Not to be Teflon.

Materials (Contd.)

Corrosive Service Materials (Contd.)

Duplex Material Variations (Standard & Backpressure Design)				
Part	Duplex Valve Construction ¹			
	D1	D2	D3	D4
Base				
19000L, 19000M	Duplex	Duplex	Duplex	Duplex
19000H	Duplex ²	Duplex ²	Duplex ²	Duplex ²
Disc (MS)				
19000L & M	Duplex	Duplex	Duplex	Duplex
19000L & M (Steam) ³ , 19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
O-Ring Retainer (DA & BP)				
19000L, 19000M	Duplex	Duplex	Duplex	Duplex
19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Disc Holder (BP-Soft Seat Only)				
Metal Seat; 19000L, 19000M, 19000H	316 Stainless Steel	Duplex	Duplex	Duplex
Soft Seat; 19000L	Duplex	Duplex	Duplex	Duplex
Soft Seat; 19000M, 19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Guide	316 Stainless Steel	Duplex	Duplex	Duplex
Bonnet (DA & MS)	ASME SA216 WCC Carbon St.	ASME SA216 WCC Carbon St.	Duplex	Duplex
Bonnet Top & Bonnet Bottom (BP Only)	ASME SA105 Carbon St.	ASME SA105 Carbon St.	Duplex	Duplex
Spindle (BP-Soft Seat Only)				
Metal Seat; 19000L, 19000M; Soft Seat; 19000L	316 Stainless Steel	Duplex	Duplex	Duplex
Metal Seat; 19000H; Soft Seat; 19000M, 19000H	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Spring Washer	Carbon Steel	Carbon Steel	Carbon Steel	Duplex
Spring (BP-19000M Only)				
19000Lc	17-7 PH Stainless Steel	17-7 PH Stainless Steel	17-7 PH Stainless Steel	Duplex
19000Lt, 19000Mt, 19000Ht	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
19000Mc, 19000Hc	17-7 PH Stainless Steel	17-7 PH Stainless Steel	17-7 PH Stainless Steel	Inconel X-750
Adjusting Screw, Adj. Screw Locknut	316 Stainless Steel	316 Stainless Steel	Duplex	Duplex
Gag Bolt	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Sealing Plug, Screwed Cap	Carbon Steel	Carbon Steel	Duplex	Duplex
Sealing Plug Gasket, Cap Gasket	Soft Iron	Soft Iron	Monel	Monel
Packed Cap, Cap Screw, Lever Pin	Carbon Steel	Carbon Steel	N/A	N/A
Cam Shaft	410 Stainless Steel	410 Stainless Steel	N/A	N/A
Bushing	416 Stainless Steel	416 Stainless Steel	N/A	N/A
Bushing Gasket	Soft Iron	Soft Iron	N/A	N/A
Packed Lifting Lever, Plain Lifting Lever	Malleable Iron	Malleable Iron	N/A	N/A
Drive Pin	Steel (Ni-Plated)	Steel (Ni-Plated)	N/A	N/A
O-Ring	Viton 70	Viton 70	N/A	N/A
Release Nut, Release Locknut	Carbon Steel	Carbon Steel	N/A	N/A
Plain Lever Cap	Malleable Iron	Malleable Iron	N/A	N/A
Inlet Extension, Inlet Nipple Ext. (Optional)	Duplex	Duplex	Duplex	Duplex
Inlet Flange, Outlet Flange	ASME SA105 Carbon Steel	ASME SA105 Carbon St.	Duplex	Duplex
Outlet Ext., Outlet Nipple Ext. (Optional)	316 Stainless Steel	316 Stainless Steel	Duplex	Duplex
O-Ring Retainer Lockscrew (DA & BP)	Duplex	Duplex	Duplex	Duplex
O-Ring Seat Seal (DA & BP)	Select	Select	Select	Select
Backup Plate O-Ring(BP Only)	Select	Select	Select	Select
Spindle O-Ring	Select ⁴	Select ⁴	Select ⁴	Select ⁴
Backup Plate (BP Only)	Duplex	Duplex	Duplex	Duplex

Notes:

- Parts made from castings shall be constructed from ASME SA995 CE8MN Duplex. Parts made from barstock shall be constructed from ASME SA479 UNS S31803 Duplex.
- Stellite or Equivalent Seats.
- Supplied for steam service at and above 251°F (122°C).
- Not to be Teflon.

Materials (Contd.)

Corrosive Service Materials (Contd.)

Low Temperature Material Variation (Standard and Backpressure Design) ¹	
Part	Material Variation (-C1)
Base	
19000L, 19000M	ASME SA479 316 Stainless Steel
19000H	ASME SA479 316L Stainless Steel ²
Disc (MS)	
19000L & M	316 Stainless Steel
19000L & M (Steam) ³	616 Stainless Steel
19000H	Inconel X-750
O-Ring Retainer (DA & BP)	
19000L, 19000M, 19000H	316 Stainless Steel
Disc Holder (BP-Soft Seat Only)	
Metal Seat: 19000L, 19000M	316 Stainless Steel
Metal Seat: 19000H, Soft Seat: 19000L	316 Stainless Steel
Soft Seat: 19000M, 19000H	Inconel X-750
Guide, Adjusting Screw, Adj. Screw Locknut	316 Stainless Steel
One Piece Bonnet (DA & MS)	ASME SA352 LCC Carbon Steel
Bonnet Top & Bonnet Bottom (BP Only)	ASME SA479 316 Stainless Steel
Spindle (BP-Soft Seat Only)	
Metal Seat: 19000L, 19000M; Soft Seat: 19000L	316 Stainless Steel
Metal Seat: 19000H; Soft Seat: 19000M, 19000H	Inconel X-750
Spring Washer, Screwed Cap, Packed Cap	316 Stainless Steel
Spring (BP-19000M Only)	
19000Lc, 19000Mc, 19000Hc	17-7 PH Stainless Steel
19000Lt, 19000Mt, 19000Ht	Inconel X-750
Gag Bolt, Sealing Plug, Cap Screw	Carbon Steel
Sealing Plug Gasket, Cap Gasket	Soft Iron
Cam Shaft	410 Stainless Steel
Bushing	416 Stainless Steel
Bushing Gasket	Soft Iron
Packed Lifting Lever, Plain Lifting Lever	Malleable Iron
Drive Pin	Steel (Ni-Plated)
O-Ring	EPR-70
Release Nut, Release Locknut, Lever Pin	Carbon Steel
Plain Lever Cap	Malleable Iron
Inlet Extension, Inlet Nipple Extension (Optional)	316 Stainless Steel
Inlet Flange	ASME SA182-F316 or SA479-316 St. St.
Outlet Nipple Extension (Optional)	Carbon Steel
Outlet Extension, O-Ring Retainer Lockscrew (DA & BP)	316 Stainless Steel
Backup Plate (BP Only)	316 Stainless Steel
Outlet Flange	ASME SA182-F316 or SA479-316 St. St.
O-Ring Seat Seal (DA & BP), Backup Plate O-Ring (BP Only)	Select
Spindle O-Ring (BP Only)	Select ⁴

Notes:

1. Applicable to Ambient Temperatures of -50°F (-45.6°C).
2. Stellite or Equivalent Seats
3. Supplied for steam service at and above 251°F (122°C).
4. Not to be Teflon.

Materials (Contd.)

Corrosive Service Materials (Contd.)

Low Temperature Material Variation (Standard Design only) ¹	
Part	Material Variation (-L3)
Base	
19000L, 19000M	ASME SA479 316 Stainless Steel
19000H	ASME SA479 316 Stainless Steel, Stellite or Equivalent Seats
Disc (MS)	
19000L & M	316 Stainless Steel ²
Disc Holder	
Metal Seat: 1900L, 1900M	316 Stainless Steel ²
Guide, Adj. Screw Locknut	316 Stainless Steel
One Piece Bonnet (DA & MS)	ASME SA351 CF8M Stainless Steel
Spindle	
Metal Seat: 1900L, 1900M	316 Stainless Steel ²
Spring Washer	316 Stainless Steel ²
Spring	
19000Lc	316 Stainless Steel
19000Lt, 19000Mc, 19000Mt	Inconel X-750
Adjusting Screw	316 Stainless Steel ²
Gag Bolt, Sealing Plug	316 Stainless Steel
Sealing Plug Gasket, Cap Gasket, Bushing Gasket	Monel
Screwed Cap, Packed Cap, Cam Shaft	316 Stainless Steel
Bushing, Packed Lifting Lever	316 Stainless Steel
Drive Pin	303 Stainless Steel
O-Ring	Viton 70
Release Nut, Release Locknut, Plain Lever Cap	316 Stainless Steel
Plain Lifting Lever, Cap Screw, Lever Pin	316 Stainless Steel
Inlet Extension, Inlet Nipple Extension (Optional)	316 Stainless Steel
Inlet Flange, Outlet Flange	ASME SA182-F316 or SA479-316 Stainless Steel
Outlet Extension, Outlet Nipple Extension (Optional)	316 Stainless Steel

Notes:

1. Applicable to service temperatures of -151°F to -450°F (-102°C to -268°C), such as Cryogenic Service.
2. Titanium Nitrite Coating (TNC) required.

Materials (Contd.)

O-Ring Selection Procedure

In addition to the rating of the valve based on materials and temperatures, it is possible that if the valve is equipped with O-Rings (soft seats), the O-Ring may limit the range of valve application.

The following selection process is simple and straight forward and should yield a satisfactory valve selection.

Use the following steps in the O-Ring selection process:

1. Refer to the Technical Information section in this catalog to select appropriate O-Ring material for service media.
2. Refer to "Table A" (O-Ring Selection - Durometer). Using the valve set pressure, determine the durometer hardness which will be needed.
3. Refer to "Table B". Utilizing the material selected and the durometer hardness selected check the temperature limits of the material.
4. If the selected material is not adequate, select another material and repeat the procedure.

Notes:

1. For fire applications use the operating temperature when selecting a material.

Table A: O-Ring Selection - Durometer

Valve Type	O-Ring Durometer												Teflon							
	Set Pressure								Set Pressure								-300 to 200 °F (-184.4 to 93.3 °C)			
	50 ¹				70 ¹				90 ²				-300 to 200 °F (-184.4 to 93.3 °C)				201 to 500 °F (93.9 to 260 °C)			
	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	psig	barg	psig	barg	psig	barg	psig	barg
19096	5	0.34	50	3.45	51	3.52	500	34.47	501	34.54	2500	172.37	1400	96.53	5000	344.74	15	1.03	5000	344.74
19110	5	0.34	50	3.45	51	3.52	500	34.47	501	34.54	2500	172.37	1400	96.53	5000	344.74	15	1.03	5000	344.74
19126	5	0.34	50	3.45	51	3.52	500	34.47	501	34.54	2250	155.13	1000	68.95	6000	413.69	15	1.03	6000	413.69
19226	5	0.34	50	3.45	51	3.52	450	31.03	451	31.10	2000	137.90	1000	68.95	6000	413.69	15	1.03	6000	413.69
19357	5	0.34	50	3.45	51	3.52	400	27.58	401	27.65	1500	103.42	-	-	-	-	15	1.03	1500	103.42
19567	5	0.34	50	3.45	51	3.52	400	27.58	401	27.65	1000	68.95	-	-	-	-	15	1.03	1000	68.95

Notes:

1. Maximum set pressure for silicone compounds is half of the maximum value.
2. The E9 62-90D O-Ring can be used in steam service to a lower pressure limit of 15 psig (1.03 barg).

Materials (Contd.)

O-Ring Selection Procedure

Table B: O-Ring Temperature Limits


Material	Durometer	Description	Temperature Limits			
			min. °F	min. °C	max. °F	max. °C
Nitrile	50	N299-50 or N1009-50	-45	-42	225	107
	70	N674-70	-40	-40	250	121
	90	N552-90	-40	-40	250	121
	70 ¹	N1173-70	-25	-31	300	148
Ethylene/Propylene	50	E981-50	-65	-53	212	100
	70	E603-70	-65	-53	212	100
	75 & 80 ²	E740-75 & E515-80	-70	-56	250	121
	90	E962-90 ³	-70	-56	500	260
	75 ⁴	E962-75	-60	-51	250 / 400	121 / 204
	50	V986-50	-15	-26	400	204
	75	V747-75 or V884-75	-15	-26	400	204
Fluorocarbon	90	V894-90 or V709-90	-15	-26	400	204
	50	C267-50	-45	-42	300	148
	70	C944-70 or C873-70	-45	-42	300	148
Silicone	50	S595-50	-65	-53	437	225
	70	S604-70	-65	-53	437	225
Teflon	N/A	Teflon	-300	-184	505	263
Kalrez ⁵	82	1050LF	-4	-20	550	287
Kalrez ⁵	75	4079	-4	-20	600	315
Kalrez ⁵	91	3018	-4	-20	550	287
Kalrez ⁵	65	1058	-4	-20	500	260

Notes:

1. Consult Factory before using. For use with Freon 134A/Ester Oil Service.
2. Set Pressure Ranges per "Table B" For durometer shall apply to these compounds (For Nuclear Service, Radiation Environment.)
3. EPR962-90D can be used in steam service to a lower pressure limit of 15 psig (1.03 barg). A maximum temperature of 500°F (260°C) is possible for steam only.
4. Up to 400°F (204.4°C) for steam applications only.
5. Consult Factory before selecting. (4079 - Not for use in hot water or steam applications.)

Dimensions & Weights

Threaded Connections

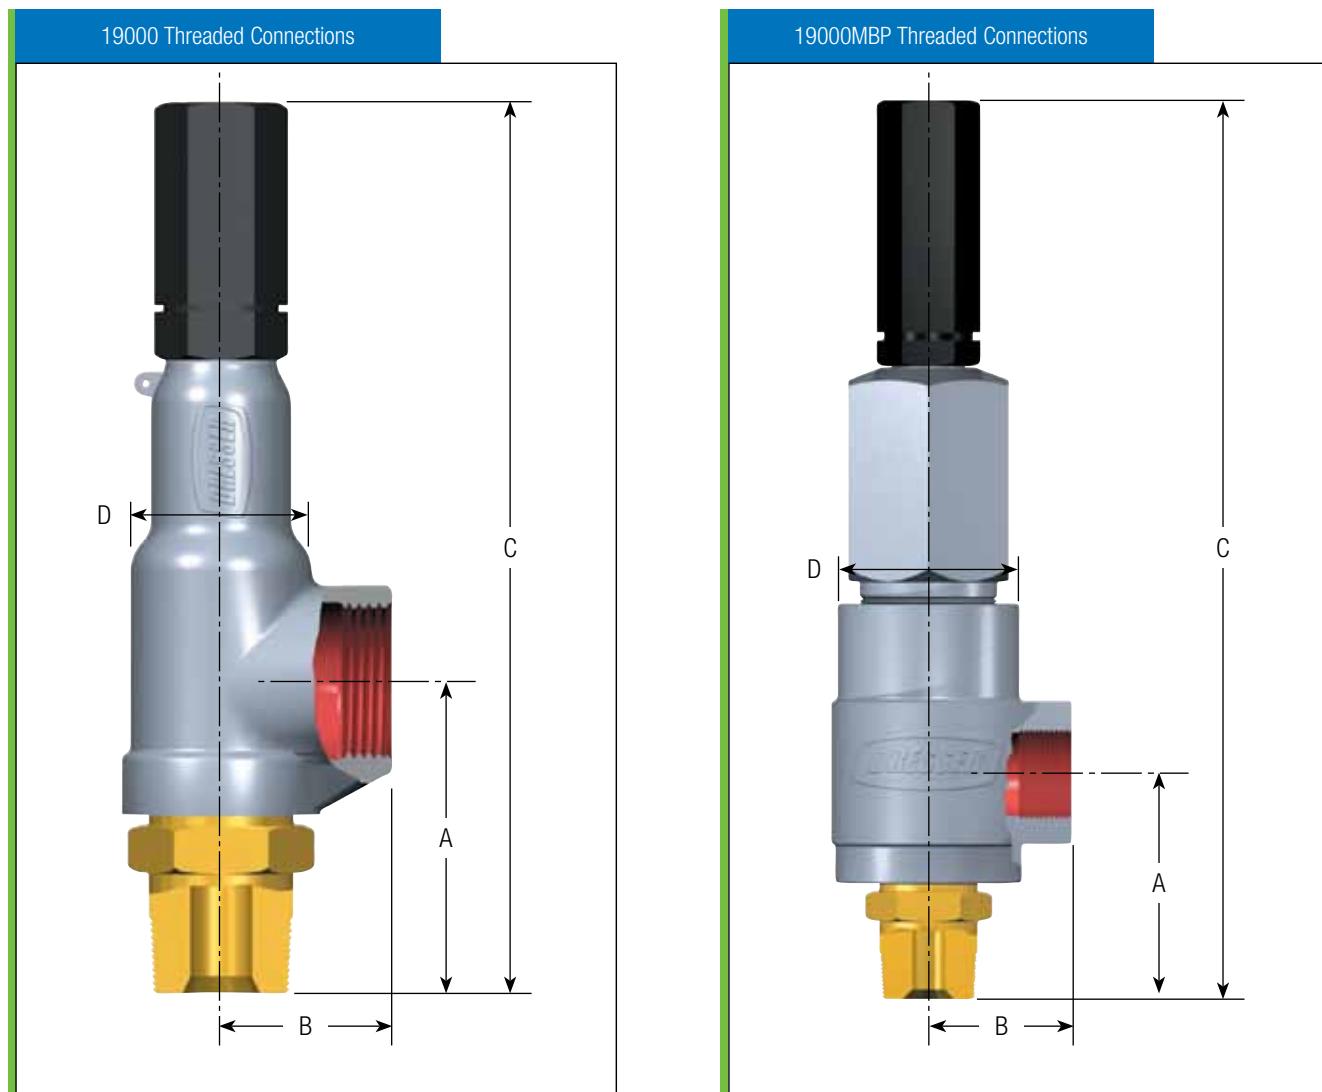

The key to selecting the appropriate dimensions is to use the numbers in the column named "Valve Type". The "Inlet" column defines the valve by inlet size and connection type, then by outlet size and connection type.

Example: .50 - MNPT x 1.0 - FNPT

Inlet size is .500" (12.70 mm) with a male NPT pipe thread and the outlet is 1" (25.4 mm) size with a female NPT pipe thread. "SW" indicates socket weld. "Flanged Connections" show size of flange and pressure rating.

CAUTION

Do not seal weld inlet and outlet connections.

Dimensions & Weights (Contd.)

Threaded Connections (Contd.)

Threaded Connections (Standard & Backpressure Designs)														
Valve Type	Inlet			Outlet			A		B		C			
	Size		Type ¹	Size		Type ¹					in	mm	in	mm
	in	mm		in	mm						in	mm	in	mm
19096L	.50	12.7	MNPT	1.00	25.4	FNPT	3.25	82.6	1.88	47.75	10.38	263.7	N/A	N/A
	.75	19.1	MNPT	1.00	25.4	FNPT	3.25	82.6	1.88	47.75	10.38	263.7	N/A	N/A
	.75	19.1	FNPT	1.00	25.4	FNPT	3.13	79.5	1.88	47.75	10.25	260.4	N/A	N/A
	1.00	25.4	MNPT	1.00	25.4	FNPT	3.25	82.6	1.88	47.75	10.38	263.7	N/A	N/A
19096M	.50	12.7	MNPT	1.00	25.4	FNPT	3.25	82.6	2.00	50.80	12.19	309.6	12.88	327.2
	.75	19.1	MNPT	1.00	25.4	FNPT	3.25	82.6	2.00	50.80	12.19	309.6	12.88	327.2
	.75	19.1	FNPT	1.00	25.4	FNPT	3.13	79.5	2.00	50.80	12.06	306.3	12.75	323.9
	1.00	25.4	MNPT	1.00	25.4	FNPT	3.25	82.6	2.00	50.80	12.19	309.6	12.88	327.2
19096H	.75	19.1	FNPT	1.00	25.4	FNPT	3.13	79.5	2.38	60.45	12.50	317.5	N/A	N/A
19110L	.50	12.7	MNPT	1.00	25.4	FNPT	3.25	82.6	1.88	47.75	10.38	263.7	N/A	N/A
	.75	19.1	MNPT	1.00	25.4	FNPT	3.25	82.6	1.88	47.75	10.38	263.7	N/A	N/A
	.75	19.1	FNPT	1.00	25.4	FNPT	3.13	79.5	1.88	47.75	10.25	260.4	N/A	N/A
	1.00	25.4	MNPT	1.00	25.4	FNPT	3.25	82.6	1.88	47.75	10.38	263.7	N/A	N/A
19110M	.50	12.7	MNPT	1.00	25.4	FNPT	3.25	82.6	2.00	50.80	12.19	309.6	N/A	N/A
	.75	19.1	MNPT	1.00	25.4	FNPT	3.25	82.6	2.00	50.80	12.19	309.6	N/A	N/A
	.75	19.1	FNPT	1.00	25.4	FNPT	3.13	79.5	2.00	50.80	12.06	306.3	N/A	N/A
	1.00	25.4	MNPT	1.00	25.4	FNPT	3.25	82.6	2.00	50.80	12.19	309.6	N/A	N/A
19110H	.75	19.1	FNPT	1.00	25.4	FNPT	3.13	79.5	2.38	60.45	12.50	317.5	N/A	N/A
19126L	.75	19.1	MNPT	1.00	25.4	FNPT	3.25	82.6	1.88	47.75	10.38	263.7	N/A	N/A
	.75	19.1	FNPT	1.00	25.4	FNPT	3.13	79.5	1.88	47.75	10.25	260.4	N/A	N/A
	1.00	25.4	MNPT	1.00	25.4	FNPT	3.25	82.6	1.88	47.75	10.38	263.7	N/A	N/A
19126M	.75	19.1	MNPT	1.00	25.4	FNPT	3.25	82.6	2.00	50.80	12.19	309.6	N/A	N/A
	.75	19.1	FNPT	1.00	25.4	FNPT	3.13	79.5	2.00	50.80	12.06	306.3	N/A	N/A
	1.00	25.4	MNPT	1.00	25.4	FNPT	3.25	82.6	2.00	50.80	12.19	309.6	N/A	N/A
19126H	.75	19.1	FNPT	1.00	25.4	FNPT	3.13	79.5	3.13	79.50	15.94	404.9	N/A	N/A
19226L	1.00	25.4	MNPT	1.50	38.1	FNPT	3.63	92.2	2.25	57.15	11.63	295.4	N/A	N/A
	1.00	25.4	FNPT	1.50	38.1	FNPT	3.38	85.9	2.25	57.15	11.38	289.1	N/A	N/A
19226M	1.00	25.4	MNPT	1.50	38.1	FNPT	3.63	92.2	2.38	60.45	13.00	330.2	N/A	N/A
	1.00	25.4	FNPT	1.50	38.1	FNPT	3.38	85.9	2.38	60.45	12.75	323.9	N/A	N/A
19226H	1.00	25.4	FNPT	1.50	38.1	FNPT	3.13	79.5	3.13	79.50	15.94	404.9	N/A	N/A
19357L	1.50	38.1	FNPT	2.00	50.8	FNPT	4.06	103.1	3.13	79.50	15.06	382.5	N/A	N/A
19357M	1.50	38.1	FNPT	2.00	50.8	FNPT	4.06	103.1	3.13	79.50	16.88	428.8	N/A	N/A
19567L	2.00	50.8	FNPT	2.50	63.5	FNPT	4.06	103.1	3.13	79.50	15.06	382.5	N/A	N/A
19567M	2.00	50.8	FNPT	2.50	63.5	FNPT	4.06	103.1	3.13	79.50	16.88	428.8	N/A	N/A

Notes:

1. Valves are provided with a male pipe threaded (MNPT) or a female pipe threaded (FNPT) inlet connection.

Dimensions & Weights (Contd.)

Threaded Connections (Contd.)

Threaded Connections (Standard & Backpressure Designs)																
Valve Type	Inlet		Type ¹	Outlet		Type ¹	D				Approx. Weight					
	Size			Size			STD		MBP		STD		MBP			
	in	mm		in	mm		in	mm	in	mm	lb	kg	lb	kg		
19096L	.50	12.7	MNPT	1.00	25.4	FNPT	2.00	50.8	N/A	N/A	4.75	2.15	N/A	N/A		
	.75	19.1	MNPT	1.00	25.4	FNPT	2.00	50.8	N/A	N/A	4.75	2.15	N/A	N/A		
	.75	19.1	FNPT	1.00	25.4	FNPT	2.00	50.8	N/A	N/A	4.50	2.04	N/A	N/A		
	1.00	25.4	MNPT	1.00	25.4	FNPT	2.00	50.8	N/A	N/A	4.75	2.15	N/A	N/A		
19096M	.50	12.7	MNPT	1.00	25.4	FNPT	2.56	65.0	3.75	95.3	6.50	2.95	11.5	5.22		
	.75	19.1	MNPT	1.00	25.4	FNPT	2.56	65.0	3.75	95.3	6.50	2.95	11.5	5.22		
	.75	19.1	FNPT	1.00	25.4	FNPT	2.56	65.0	3.75	95.3	6.50	2.95	11.5	5.22		
	1.00	25.4	MNPT	1.00	25.4	FNPT	2.56	65.0	3.75	95.3	6.50	2.95	11.5	5.22		
19096H	.75	19.1	FNPT	1.00	25.4	FNPT	3.13	79.5	N/A	N/A	11.50	5.22	N/A	N/A		
19110L	.50	12.7	MNPT	1.00	25.4	FNPT	2.00	50.8	N/A	N/A	4.75	2.15	N/A	N/A		
	.75	19.1	MNPT	1.00	25.4	FNPT	2.00	50.8	N/A	N/A	4.75	2.15	N/A	N/A		
	.75	19.1	FNPT	1.00	25.4	FNPT	2.00	50.8	N/A	N/A	4.50	2.04	N/A	N/A		
	1.00	25.4	MNPT	1.00	25.4	FNPT	2.00	50.8	N/A	N/A	4.75	2.15	N/A	N/A		
19110M	.50	12.7	MNPT	1.00	25.4	FNPT	2.56	65.0	N/A	N/A	6.50	2.95	N/A	N/A		
	.75	19.1	MNPT	1.00	25.4	FNPT	2.56	65.0	N/A	N/A	6.50	2.95	N/A	N/A		
	.75	19.1	FNPT	1.00	25.4	FNPT	2.56	65.0	N/A	N/A	6.50	2.95	N/A	N/A		
	1.00	25.4	MNPT	1.00	25.4	FNPT	2.56	65.0	N/A	N/A	6.50	2.95	N/A	N/A		
19110H	.75	19.1	FNPT	1.00	25.4	FNPT	3.13	79.5	N/A	N/A	11.50	5.22	N/A	N/A		
19126L	.75	19.1	MNPT	1.00	25.4	FNPT	2.00	50.8	N/A	N/A	5.25	2.38	N/A	N/A		
	.75	19.1	FNPT	1.00	25.4	FNPT	2.00	50.8	N/A	N/A	5.00	2.27	N/A	N/A		
	1.00	25.4	MNPT	1.00	25.4	FNPT	2.00	50.8	N/A	N/A	5.25	2.38	N/A	N/A		
	.75	19.1	MNPT	1.00	25.4	FNPT	2.56	65.0	N/A	N/A	6.50	2.95	N/A	N/A		
19126M	.75	19.1	FNPT	1.00	25.4	FNPT	2.56	65.0	N/A	N/A	6.50	2.95	N/A	N/A		
	1.00	25.4	MNPT	1.00	25.4	FNPT	2.56	65.0	N/A	N/A	6.50	2.95	N/A	N/A		
19126H	.75	19.1	FNPT	1.00	25.4	FNPT	4.63	117.6	N/A	N/A	30.00	13.61	N/A	N/A		
19226L	1.00	25.4	MNPT	1.50	38.1	FNPT	2.38	60.5	N/A	N/A	6.75	3.06	N/A	N/A		
	1.00	25.4	FNPT	1.50	38.1	FNPT	2.38	60.5	N/A	N/A	6.50	2.95	N/A	N/A		
19226M	1.00	25.4	MNPT	1.50	38.1	FNPT	3.13	79.5	N/A	N/A	11.50	5.22	N/A	N/A		
	1.00	25.4	FNPT	1.50	38.1	FNPT	3.13	79.5	N/A	N/A	11.50	5.22	N/A	N/A		
19226H	1.00	25.4	FNPT	1.50	38.1	FNPT	4.63	117.6	N/A	N/A	30.00	13.61	N/A	N/A		
19357L	1.50	38.1	FNPT	2.00	50.8	FNPT	3.63	92.2	N/A	N/A	18.00	8.16	N/A	N/A		
19357M	1.50	38.1	FNPT	2.00	50.8	FNPT	4.63	117.6	N/A	N/A	30.00	13.61	N/A	N/A		
19567L	2.00	50.8	FNPT	2.50	63.5	FNPT	3.63	92.2	N/A	N/A	19.00	8.62	N/A	N/A		
19567M	2.00	50.8	FNPT	2.50	63.5	FNPT	4.63	117.6	N/A	N/A	30.00	13.61	N/A	N/A		


Notes:

1. Valves are provided with a male pipe threaded (MNPT) or a female pipe threaded (FNPT) inlet connection.


Dimensions & Weights (Contd.)

Socket Weld Connections

19000 Socket Weld Connections

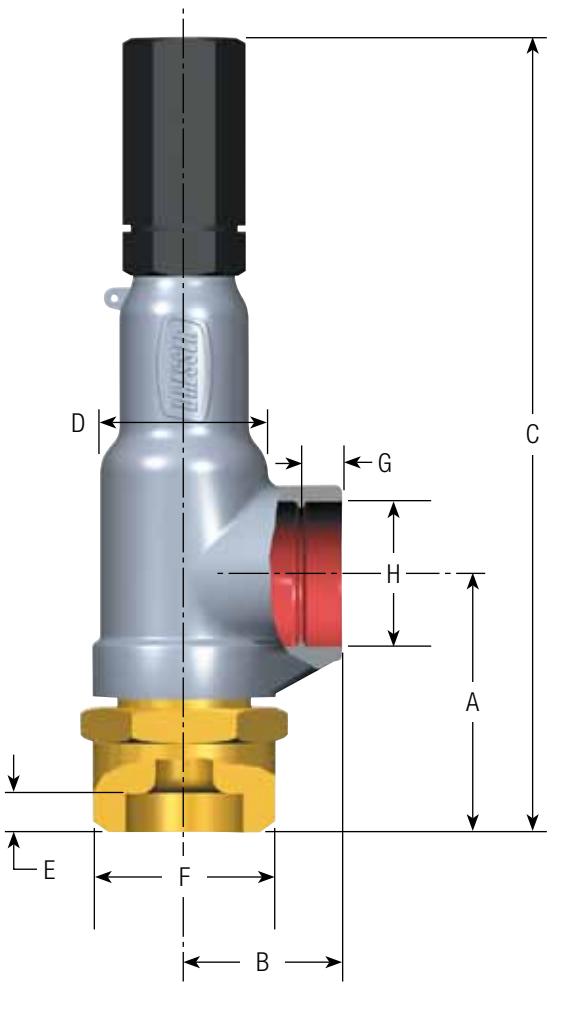

19000MBP Socket Weld Connections

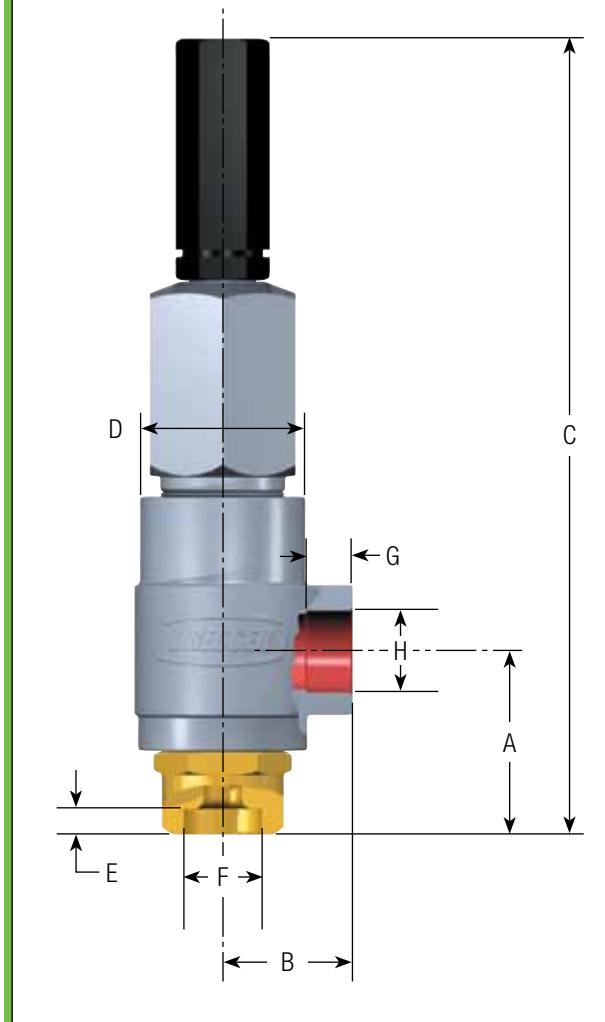

CAUTION

Avoid excessive weld deposits.

Dimensions & Weights (Contd.)

Socket Weld Connections (Contd.)

		Socket Weld Connections (Standard & Backpressure Designs)																
Valve Type	Inlet			Outlet			A		B		C				D			
	Size		Type	Size		Type	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
	in	mm		in	mm													
19096L	.50	12.7	SW	1.00	25.4	SW	3.50	88.9	1.88	47.8	10.63	270.0	N/A	N/A	2.00	50.8	N/A	N/A
	.75	19.1	SW	1.00	25.4	SW	3.50	88.9	1.88	47.8	10.63	270.0	N/A	N/A	2.00	50.8	N/A	N/A
	1.00	25.4	SW	1.00	25.4	SW	3.50	88.9	1.88	47.8	10.63	270.0	N/A	N/A	2.00	50.8	N/A	N/A
19096M	.50	12.7	SW	1.00	25.4	SW	3.50	88.9	2.00	50.8	12.44	316.0	13.13	333.4	2.56	65.0	3.75	95.3
	.75	19.1	SW	1.00	25.4	SW	3.50	88.9	2.00	50.8	12.44	316.0	13.13	333.4	2.56	65.0	3.75	95.3
	1.00	25.4	SW	1.00	25.4	SW	3.50	88.9	2.00	50.8	12.44	316.0	13.13	333.4	2.56	65.0	3.75	95.3
19096H	.75	19.1	SW	1.00	25.4	SW	4.00	101.6	2.38	60.5	13.38	339.9	N/A	N/A	3.13	79.5	N/A	N/A
	.50	12.7	SW	1.00	25.4	SW	3.50	88.9	1.88	47.8	10.63	270.0	N/A	N/A	2.00	50.8	N/A	N/A
	.75	19.1	SW	1.00	25.4	SW	3.50	88.9	1.88	47.8	10.63	270.0	N/A	N/A	2.00	50.8	N/A	N/A
19110L	.50	12.7	SW	1.00	25.4	SW	3.50	88.9	1.88	47.8	10.63	270.0	N/A	N/A	2.00	50.8	N/A	N/A
	.75	19.1	SW	1.00	25.4	SW	3.50	88.9	1.88	47.8	10.63	270.0	N/A	N/A	2.00	50.8	N/A	N/A
	1.00	25.4	SW	1.00	25.4	SW	3.50	88.9	1.88	47.8	10.63	270.0	N/A	N/A	2.00	50.8	N/A	N/A
19110M	.50	12.7	SW	1.00	25.4	SW	3.50	88.9	2.00	50.8	12.44	316.0	N/A	N/A	2.56	65.0	N/A	N/A
	.75	19.1	SW	1.00	25.4	SW	3.50	88.9	2.00	50.8	12.44	316.0	N/A	N/A	2.56	65.0	N/A	N/A
	1.00	25.4	SW	1.00	25.4	SW	3.50	88.9	2.00	50.8	12.44	316.0	N/A	N/A	2.56	65.0	N/A	N/A
19110H	.75	19.1	SW	1.00	25.4	SW	4.00	101.6	2.38	60.5	13.38	339.9	N/A	N/A	3.13	79.5	N/A	N/A
	.75	19.1	SW	1.00	25.4	SW	3.50	88.9	1.88	47.8	10.63	270.0	N/A	N/A	2.00	50.8	N/A	N/A
	1.00	25.4	SW	1.00	25.4	SW	3.50	88.9	1.88	47.8	10.63	270.0	N/A	N/A	2.00	50.8	N/A	N/A
19126L	.75	19.1	SW	1.00	25.4	SW	3.50	88.9	1.88	47.8	10.63	270.0	N/A	N/A	2.00	50.8	N/A	N/A
	1.00	25.4	SW	1.00	25.4	SW	3.50	88.9	1.88	47.8	10.63	270.0	N/A	N/A	2.00	50.8	N/A	N/A
	.75	19.1	SW	1.00	25.4	SW	3.50	88.9	2.00	50.8	12.44	316.0	N/A	N/A	2.56	65.0	N/A	N/A
19126M	.75	19.1	SW	1.00	25.4	SW	3.50	88.9	2.00	50.8	12.44	316.0	N/A	N/A	2.56	65.0	N/A	N/A
	1.00	25.4	SW	1.00	25.4	SW	3.50	88.9	2.00	50.8	12.44	316.0	N/A	N/A	2.56	65.0	N/A	N/A
	.75	19.1	SW	1.00	25.4	SW	3.50	88.9	2.00	50.8	12.44	316.0	N/A	N/A	2.56	65.0	N/A	N/A
19126H	.75	19.1	SW	1.00	25.4	SW	4.50	114.3	3.13	79.5	17.31	439.7	N/A	N/A	4.63	117.6	N/A	N/A
	1.00	25.4	SW	1.50	38.1	SW	3.94	100.1	2.25	57.2	11.94	303.3	N/A	N/A	2.38	60.5	N/A	N/A
	1.00	25.4	SW	1.50	38.1	SW	3.94	100.1	2.38	60.5	13.31	338.1	N/A	N/A	3.13	79.5	N/A	N/A
19226L	1.00	25.4	SW	1.50	38.1	SW	4.50	114.3	3.13	79.5	17.31	439.7	N/A	N/A	4.63	117.6	N/A	N/A
	1.00	25.4	SW	1.50	38.1	SW	4.50	114.3	3.13	79.5	17.31	439.7	N/A	N/A	4.63	117.6	N/A	N/A
	1.00	25.4	SW	1.50	38.1	SW	4.75	120.7	3.13	79.5	15.75	400.1	N/A	N/A	3.63	92.2	N/A	N/A
19226M	1.00	25.4	SW	1.50	38.1	SW	4.75	120.7	3.13	79.5	17.56	446.0	N/A	N/A	4.63	117.6	N/A	N/A
	1.00	25.4	SW	1.50	38.1	SW	4.75	120.7	3.13	79.5	16.38	416.1	N/A	N/A	3.63	92.2	N/A	N/A
	1.00	25.4	SW	1.50	38.1	SW	4.75	120.7	3.13	79.5	18.19	462.0	N/A	N/A	4.63	117.6	N/A	N/A
19357L	1.50	38.1	SW	2.00	50.8	SW	4.75	120.7	3.13	79.5	15.75	400.1	N/A	N/A	3.63	92.2	N/A	N/A
	1.50	38.1	SW	2.00	50.8	SW	4.75	120.7	3.13	79.5	17.56	446.0	N/A	N/A	4.63	117.6	N/A	N/A
	2.00	50.8	SW	2.50	63.5	SW	5.38	136.7	3.13	79.5	16.38	416.1	N/A	N/A	3.63	92.2	N/A	N/A
19567L	2.00	50.8	SW	2.50	63.5	SW	5.38	136.7	3.13	79.5	18.19	462.0	N/A	N/A	4.63	117.6	N/A	N/A
	2.00	50.8	SW	2.50	63.5	SW	5.38	136.7	3.13	79.5	18.19	462.0	N/A	N/A	4.63	117.6	N/A	N/A
	2.00	50.8	SW	2.50	63.5	SW	5.38	136.7	3.13	79.5	18.19	462.0	N/A	N/A	4.63	117.6	N/A	N/A


Dimensions & Weights (Contd.)

Socket Weld Connections (Contd.)

Valve Type	Socket Weld Connections (Standard & Backpressure Designs)												Approx. Weight				
	Inlet		Outlet		E		F		G		H		STD		MBP		
	Size	Type	Size	Type	in	mm	in	mm	in	mm	in	mm	lb	kg	lb	kg	
19096L	.50	12.7	SW	1.00	25.4	SW	.50	12.7	.86	21.7	.63	16.0	1.33	33.8	5.50	2.49	N/A N/A
	.75	19.1	SW	1.00	25.4	SW	.50	12.7	1.07	27.1	.63	16.0	1.33	33.8	5.50	2.49	N/A N/A
	1.00	25.4	SW	1.00	25.4	SW	.50	12.7	1.33	33.8	.63	16.0	1.33	33.8	6.25	2.83	N/A N/A
19096M	.50	12.7	SW	1.00	25.4	SW	.50	12.7	.86	21.7	.63	16.0	1.33	33.8	7.00	3.18	12.00 5.44
	.75	19.1	SW	1.00	25.4	SW	.50	12.7	1.07	27.1	.63	16.0	1.33	33.8	7.50	3.40	12.50 5.67
	1.00	25.4	SW	1.00	25.4	SW	.50	12.7	1.33	33.8	.63	16.0	1.33	33.8	8.00	3.63	13.00 5.90
19096H	.75	19.1	SW	1.00	25.4	SW	.50	12.7	1.07	27.1	.63	16.0	1.33	33.8	12.00	5.44	N/A N/A
19110L	.50	12.7	SW	1.00	25.4	SW	.50	12.7	.86	21.7	.63	16.0	1.33	33.8	5.50	2.49	N/A N/A
	.75	19.1	SW	1.00	25.4	SW	.50	12.7	1.07	27.1	.63	16.0	1.33	33.8	5.50	2.49	N/A N/A
	1.00	25.4	SW	1.00	25.4	SW	.50	12.7	1.33	33.8	.63	16.0	1.33	33.8	6.25	2.83	N/A N/A
19110M	.50	12.7	SW	1.00	25.4	SW	.50	12.7	.86	21.7	.63	16.0	1.33	33.8	7.00	3.18	N/A N/A
	.75	19.1	SW	1.00	25.4	SW	.50	12.7	1.07	27.1	.63	16.0	1.33	33.8	7.50	3.40	N/A N/A
	1.00	25.4	SW	1.00	25.4	SW	.50	12.7	1.33	33.8	.63	16.0	1.33	33.8	8.00	3.63	N/A N/A
19110H	.75	19.1	SW	1.00	25.4	SW	.50	12.7	1.07	27.1	.63	16.0	1.33	33.8	12.00	5.44	N/A N/A
19126L	.75	19.1	SW	1.00	25.4	SW	.50	12.7	1.07	27.1	.63	16.0	1.33	33.8	6.00	2.72	N/A N/A
	1.00	25.4	SW	1.00	25.4	SW	.50	12.7	1.33	33.8	.63	16.0	1.33	33.8	6.75	3.06	N/A N/A
19126M	.75	19.1	SW	1.00	25.4	SW	.50	12.7	1.07	27.1	.63	16.0	1.33	33.8	7.00	3.18	N/A N/A
	1.00	25.4	SW	1.00	25.4	SW	.50	12.7	1.33	33.8	.63	16.0	1.33	33.8	8.00	3.63	N/A N/A
19126H	.75	19.1	SW	1.00	25.4	SW	.63	16.0	1.07	27.1	.63	16.0	1.33	33.8	32.00	14.51	N/A N/A
19226L	1.00	25.4	SW	1.50	38.1	SW	.50	12.7	1.33	33.8	.63	16.0	1.92	48.6	8.00	3.63	N/A N/A
19226M	1.00	25.4	SW	1.50	38.1	SW	.50	12.7	1.33	33.8	.63	16.0	1.92	48.6	12.50	5.67	N/A N/A
19226H	1.00	25.4	SW	1.50	38.1	SW	.63	16.0	1.33	33.8	.63	16.0	1.92	48.6	32.00	14.51	N/A N/A
19357L	1.50	38.1	SW	2.00	50.8	SW	.63	16.0	1.92	48.6	.63	16.0	2.41	61.1	18.25	8.28	N/A N/A
19357M	1.50	38.1	SW	2.00	50.8	SW	.63	16.0	1.92	48.6	.63	16.0	2.41	61.1	31.00	14.06	N/A N/A
19567L	2.00	50.8	SW	2.50	63.5	SW	.63	16.0	2.41	61.1	.63	16.0	2.91	73.8	24.00	10.89	N/A N/A
19567M	2.00	50.8	SW	2.50	63.5	SW	.63	16.0	2.41	61.1	.63	16.0	2.91	73.8	34.00	15.42	N/A N/A

Dimensions & Weights (Contd.)

Flanged Connections

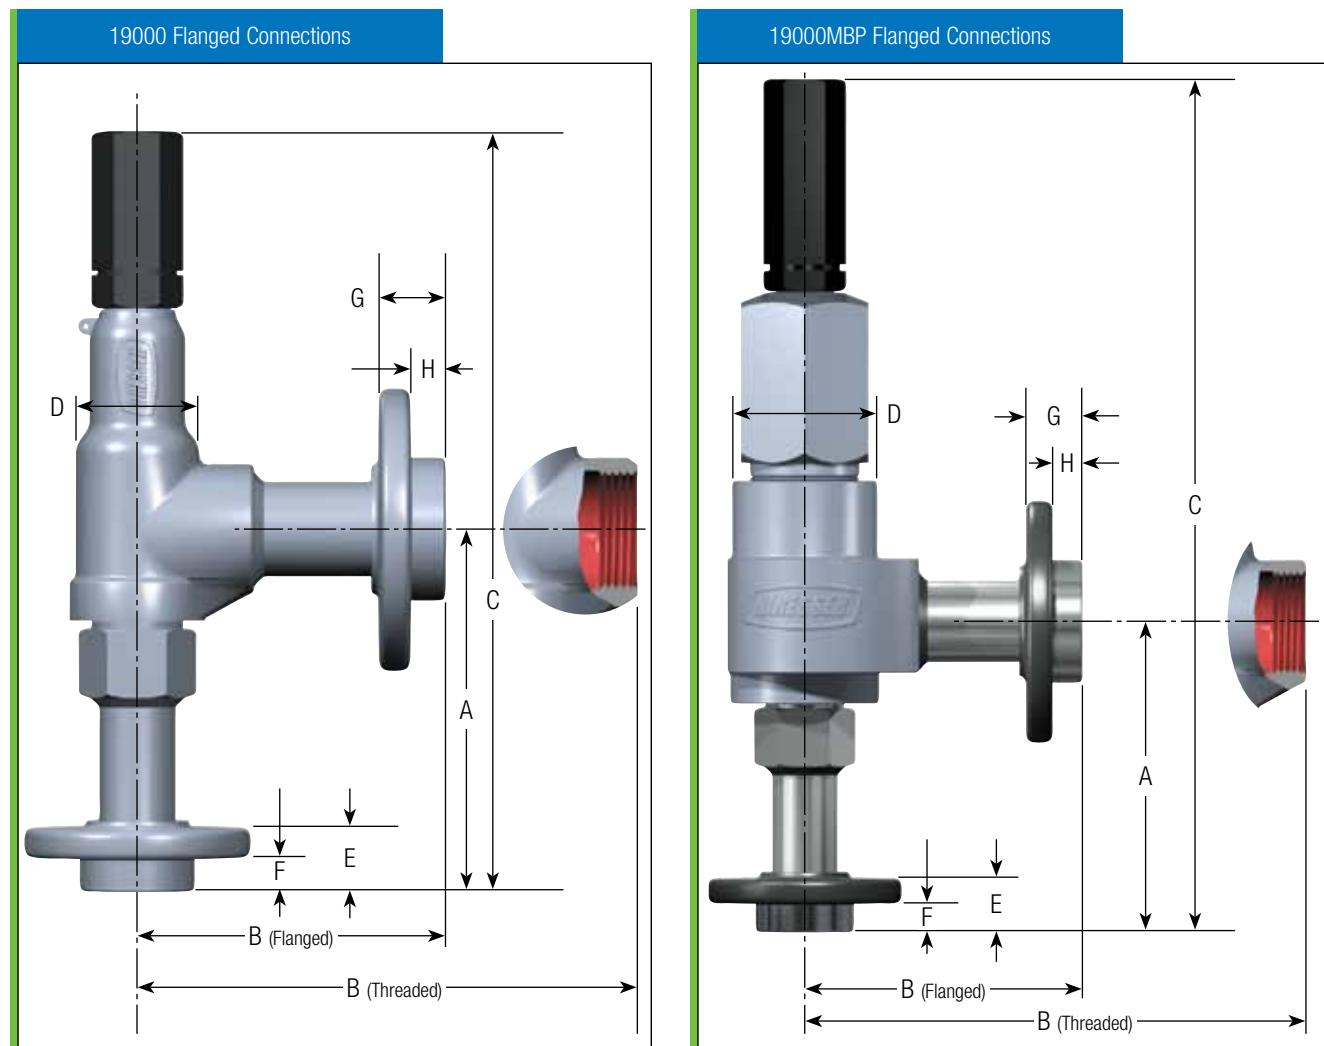

Dimensions & Weights (Contd.)

Flanged Connections (Contd.)

Flanged Connections (Standard Design)																
Valve Type	Inlet			Outlet			A		B		C		D		E	
	Size		Type	Size		Type	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
	in	mm		in	mm											
19096L 19110L	.50	12.7	150#	1.00	25.4	FNPT 150#	6.00	152.4	1.88	47.8	13.13	333.5	2.00	50.8	.88	22.4
	.50	12.7	300#	1.00	25.4	FNPT 150#	6.00	152.4	1.88	47.8	13.13	333.5	2.00	50.8	1.00	25.4
	.75	19.05	150#	1.00	25.4	FNPT 150#	6.25	158.8	7.88	200.2	13.38	339.9	2.00	50.8	1.00	25.4
	.75	19.05	300#	1.00	25.4	FNPT 150#	6.25	158.8	7.88	200.2	13.38	339.9	2.00	50.8	1.13	28.7
	1.00	25.4	150#	1.00	25.4	FNPT 150#	6.50	165.1	1.88	47.8	13.63	346.2	2.00	50.8	1.06	26.9
	1.00	25.4	300#	1.00	25.4	FNPT 150#	6.50	165.1	1.88	47.8	13.63	346.2	2.00	50.8	1.19	30.2
19126L	.75	19.05	150#	1.00	25.4	FNPT 150#	6.25	158.8	1.88	47.8	13.38	339.9	2.00	50.8	1.00	25.4
	.75	19.05	300#	1.00	25.4	FNPT 150#	6.25	158.8	1.88	47.8	13.38	339.9	2.00	50.8	1.13	28.7
	1.00	25.4	150#	1.00	25.4	FNPT 150#	6.50	165.1	1.88	47.8	13.63	346.2	2.00	50.8	1.06	26.9
	1.00	25.4	300#	1.00	25.4	FNPT 150#	6.50	165.1	1.88	47.8	13.63	346.2	2.00	50.8	1.19	30.2
19226L	1.00	25.4	150#	1.50	38.1	FNPT 150#	6.25	158.8	2.25	57.2	14.25	362.0	2.38	60.5	1.06	26.9
	1.00	25.4	300#	1.50	38.1	FNPT 150#	6.25	158.8	2.25	57.2	14.25	362.0	2.38	60.5	1.19	30.2
19357L	1.50	38.1	150#	2.00	50.8	FNPT 150#	7.13	181.1	3.13	79.5	18.13	460.5	3.63	92.2	1.19	30.2
	1.50	38.1	300#	2.00	50.8	FNPT 150#	7.13	181.1	3.13	79.5	18.13	460.5	3.63	92.2	1.31	33.3
19567L	2.00	50.8	150#	2.00	50.8	FNPT 150#	7.13	181.1	3.13	79.5	18.13	460.5	3.63	92.2	1.38	35.1
	2.00	50.8	300#	2.00	50.8	FNPT 150#	7.13	181.1	3.13	79.5	18.13	460.5	3.63	92.2	1.50	38.1

Dimensions & Weights (Contd.)

Flanged Connections (Contd.)

Flanged Connections (Standard Design)														
Valve Type	Inlet			Outlet			F		G		H		Approx. Weight	
	Size		Type	Size		Type	in.	mm	in.	mm	in.	mm	lb	kg
	in.	mm		in	mm									
19096L	.50	12.7	150#	1.00	25.4	FNPT 150#	.44	11.1	1.06	26.9	.50	12.7	6.30	2.86
													9.30	4.22
	.50	12.7	300#	1.00	25.4	FNPT 150#	.44	11.1	1.06	26.9	.50	12.7	7.30	3.31
													10.30	4.67
19110L	.75	19.05	150#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	7.00	3.18
													10.00	4.54
	.75	19.05	300#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	8.50	3.86
													11.50	5.22
19126L	1.00	25.4	150#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	7.80	3.54
													10.80	4.90
	1.00	25.4	300#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	9.30	4.22
													12.30	5.58
19226L	.75	19.05	150#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	7.50	3.40
													10.30	4.67
	.75	19.05	300#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	9.00	4.08
													12.00	5.44
19357L	1.00	25.4	150#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	8.30	3.76
													11.30	5.13
	1.00	25.4	300#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	9.80	4.45
													12.80	5.81
19567L	1.00	25.4	150#	1.50	38.1	FNPT 150#	.50	12.7	1.19	30.2	.50	12.7	9.80	4.45
													14.80	6.71
	1.00	25.4	300#	1.50	38.1	FNPT 150#	.50	12.7	1.19	30.2	.50	12.7	11.30	5.13
													16.30	7.39
19357L	1.50	38.1	150#	2.00	50.8	FNPT 150#	.50	12.7	1.38	35.1	.63	16.0	22.80	10.34
													30.30	13.74
	1.50	38.1	300#	2.00	50.8	FNPT 150#	.50	12.7	1.38	35.1	.63	16.0	26.30	11.93
													33.80	15.33
19567L	2.00	50.8	150#	2.00	50.8	FNPT 150#	.63	15.9	1.50	38.1	.63	16.0	26.80	12.16
													38.30	17.37
	2.00	50.8	300#	2.00	50.8	FNPT 150#	.63	15.9	1.50	38.1	.63	16.0	28.80	13.06
													40.30	18.28

Dimensions & Weights (Contd.)

Flanged Connections (Contd.)

Flanged Connections (Standard Design)																
Valve Type	Inlet			Outlet			A		B		C		D		E	
	Size		Type	Size		Type	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
	in	mm		in	mm											
19096M 19110M	.50	12.7	300#	1.00	25.4	FNPT 150#	6.00	152.4	2.00	50.8	14.94	379.5	2.56	65.0	1.00	25.4
	.50	12.7	600#	1.00	25.4	FNPT 150#	6.00	152.4	2.00	50.8	14.94	379.5	2.56	65.0	1.00	25.4
	.50	12.7	900#	1.00	25.4	FNPT 300#	6.50	165.1	2.00	50.8	15.44	392.2	2.56	65.0	1.50	38.1
	.50	12.7	1500#	1.00	25.4	FNPT 300#	6.50	165.1	2.00	50.8	15.44	392.2	2.56	65.0	1.50	38.1
	.75	19.1	300#	1.00	25.4	FNPT 150#	6.25	158.75	2.00	50.8	15.19	385.8	2.56	65.0	1.13	28.7
	.75	19.1	600#	1.00	25.4	FNPT 150#	6.25	158.75	2.00	50.8	15.19	385.8	2.56	65.0	1.13	28.7
	.75	19.1	900#	1.00	25.4	FNPT 300#	6.75	171.45	2.00	50.8	15.69	398.5	2.56	65.0	1.63	41.4
	.75	19.1	1500#	1.00	25.4	FNPT 300#	6.75	171.45	2.00	50.8	15.69	398.5	2.56	65.0	1.63	41.4
	1.00	25.4	300#	1.00	25.4	FNPT 150#	6.50	165.1	2.00	50.8	15.44	392.2	2.56	65.0	1.19	30.2
	1.00	25.4	600#	1.00	25.4	FNPT 150#	6.50	165.1	2.00	50.8	15.44	392.2	2.56	65.0	1.19	30.2
19126M	1.00	25.4	900#	1.00	25.4	FNPT 300#	7.50	190.5	2.00	50.8	16.44	417.6	2.56	65.0	1.75	44.5
	1.00	25.4	1500#	1.00	25.4	FNPT 300#	7.50	190.5	2.00	50.8	16.44	417.6	2.56	65.0	1.75	44.5
	.75	19.1	300#	1.00	25.4	FNPT 150#	6.25	158.75	2.00	50.8	15.19	385.8	2.56	65.0	1.13	28.7
	.75	19.1	600#	1.00	25.4	FNPT 150#	6.25	158.75	2.00	50.8	15.19	385.8	2.56	65.0	1.13	28.7
	.75	19.1	900#	1.00	25.4	FNPT 300#	6.75	171.45	2.00	50.8	15.69	398.5	2.56	65.0	1.63	41.4
	.75	19.1	1500#	1.00	25.4	FNPT 300#	6.75	171.45	2.00	50.8	15.69	398.5	2.56	65.0	1.63	41.4
	1.00	25.4	300#	1.00	25.4	FNPT 150#	6.50	165.1	2.00	50.8	15.44	392.2	2.56	65.0	1.19	30.2
	1.00	25.4	600#	1.00	25.4	FNPT 150#	6.50	165.1	2.00	50.8	15.44	392.2	2.56	65.0	1.19	30.2
	1.00	25.4	900#	1.00	25.4	FNPT 300#	7.50	190.5	2.00	50.8	16.44	417.6	2.56	65.0	1.75	44.5
	1.00	25.4	1500#	1.00	25.4	FNPT 300#	7.50	190.5	2.00	50.8	16.44	417.6	2.56	65.0	1.75	44.5

Dimensions & Weights (Contd.)

Flanged Connections (Contd.)

Flanged Connections (Standard Design)														
Valve Type	Inlet			Outlet			F		G		H		Approx. Weight	
	Size		Type	Size		Type	in	mm	in	mm	in	mm	lb	kg
	in	mm		in	mm									
19096M 19110M	.50	12.7	300#	1.00	25.4	FNPT 150#	.44	11.1	1.06	26.9	.50	12.7	9.00	4.08
													12.00	5.44
	.50	12.7	600#	1.00	25.4	FNPT 150#	.44	11.1	1.06	26.9	.50	12.7	9.00	4.08
													12.00	5.44
	.50	12.7	900#	1.00	25.4	FNPT 300#	.63	15.9	1.19	30.2	.50	12.7	13.30	6.03
													17.80	8.07
	.50	12.7	1500#	1.00	25.4	FNPT 300#	.63	15.9	1.19	30.2	.50	12.7	13.30	6.03
													17.80	8.07
	.75	19.1	300#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	10.30	4.67
													13.30	6.03
19126M	.75	19.1	600#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	10.30	4.67
													13.30	6.03
	.75	19.1	900#	1.00	25.4	FNPT 300#	.63	15.9	1.19	30.2	.50	12.7	13.50	6.12
													18.00	8.16
	.75	19.1	1500#	1.00	25.4	FNPT 300#	.63	15.9	1.19	30.2	.50	12.7	13.50	6.12
													18.00	8.16
	1.00	25.4	300#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	11.00	4.99
													14.00	6.35
	1.00	25.4	600#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	11.00	4.99
													14.00	6.35
	1.00	25.4	900#	1.00	25.4	FNPT 300#	.63	15.9	1.19	30.2	.50	12.7	15.50	7.03
													20.00	9.07
	1.00	25.4	1500#	1.00	25.4	FNPT 300#	.63	15.9	1.19	30.2	.50	12.7	15.50	7.03
													20.00	9.07
19126M	.75	19.1	300#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	10.30	4.67
													13.30	6.03
	.75	19.1	600#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	10.30	4.67
													13.30	6.03
	.75	19.1	900#	1.00	25.4	FNPT 300#	.63	15.9	1.19	30.2	.50	12.7	13.50	6.12
													18.00	8.16
	.75	19.1	1500#	1.00	25.4	FNPT 300#	.63	15.9	1.19	30.2	.50	12.7	13.50	6.12
													18.00	8.16
19126M	1.00	25.4	300#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	11.00	4.99
													14.00	6.35
	1.00	25.4	600#	1.00	25.4	FNPT 150#	.50	12.7	1.06	26.9	.50	12.7	11.00	4.99
													14.00	6.35
	1.00	25.4	900#	1.00	25.4	FNPT 300#	.63	15.9	1.19	30.2	.50	12.7	15.80	7.17
													20.30	9.21
19126M	1.00	25.4	1500#	1.00	25.4	FNPT 300#	.63	15.9	1.19	30.2	.50	12.7	15.80	7.17
													20.30	9.21

Dimensions & Weights (Contd.)

Flanged Connections (Contd.)

Flanged Connections (Standard Design)																
Valve Type	Inlet			Outlet			A		B		C		D		E	
	Size		Type	Size		Type	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
	in.	mm		in.	mm											
19226M	1.00	25.4	300#	1.50	38.1	FNPT 150#	6.25	158.8	2.38 6.13	60.5 155.7	15.63	397.0	3.13	79.5	1.19	30.2
	1.00	25.4	600#	1.50	38.1	FNPT 150#	6.25	158.8	2.38 6.13	60.5 155.7	15.63	397.0	3.13	79.5	1.19	30.2
	1.00	25.4	900#	1.50	38.1	FNPT 300#	7.25	184.2	2.38 6.13	60.5 155.7	16.63	422.4	3.13	79.5	1.75	44.5
	1.00	25.4	1500#	1.50	38.1	FNPT 300#	7.25	184.2	2.38 6.13	60.5 155.7	16.63	422.4	3.13	79.5	1.75	44.5
19357M	1.50	38.1	300#	2.00	50.8	FNPT 150#	7.13	181.1	3.13 6.13	79.5 155.7	19.94	506.5	4.63	117.6	1.31	33.3
	1.50	38.1	600#	2.00	50.8	FNPT 150#	7.13	181.1	3.13 6.13	79.5 155.7	19.94	506.5	4.63	117.6	1.38	35.1
	1.50	38.1	900#	2.00	50.8	FNPT 300#	8.25	209.6	3.13 6.13	79.5 155.7	21.06	534.9	4.63	117.6	1.88	47.8
	1.50	38.1	1500#	2.00	50.8	FNPT 300#	8.25	209.6	3.13 6.13	79.5 155.7	21.06	534.9	4.63	117.6	1.88	47.8
19567M	2.00	50.8	300#	2.50	63.5	FNPT 150#	7.13	181.1	3.13 6.13	79.5 155.7	19.94	506.5	4.63	117.6	1.50	38.1
	2.00	50.8	600#	2.50	63.5	FNPT 150#	7.13	181.1	3.13 6.13	79.5 155.7	19.94	506.5	4.63	117.6	1.63	41.4
	2.00	50.8	900#	2.50	63.5	FNPT 300#	8.25	209.6	3.13 6.13	79.5 155.7	21.06	534.9	4.63	117.6	2.13	54.1
	2.00	50.8	1500#	2.50	63.5	FNPT 300#	8.25	209.6	3.13 6.13	79.5 155.7	21.06	534.9	4.63	117.6	2.13	54.1

Dimensions & Weights (Contd.)

Flanged Connections (Contd.)

Flanged Connections (Standard Design)														
Valve Type	Inlet			Outlet			F		G		H		Approx. Weight	
	Size		Type	Size		Type	in.	mm	in.	mm	in.	mm	lb	kg
	in.	mm		in.	mm									
19226M	1.00	25.4	300#	1.50	38.1	FNPT	.50	12.7	1.19	30.2	.50	12.7	16.00	7.26
						150#	.50	12.7	1.19	30.2	.50	12.7	21.00	9.53
	1.00	25.4	600#	1.50	38.1	FNPT	.50	12.7	1.19	30.2	.50	12.7	16.00	7.26
						150#	.50	12.7	1.19	30.2	.50	12.7	21.00	9.53
	1.00	25.4	900#	1.50	38.1	FNPT	.63	15.9	1.31	33.3	.50	12.7	20.50	9.30
						300#	.63	15.9	1.31	33.3	.50	12.7	29.00	13.15
19357M	1.00	25.4	1500#	1.50	38.1	FNPT	.63	15.9	1.31	33.3	.50	12.7	20.50	9.30
						300#	.63	15.9	1.31	33.3	.50	12.7	29.00	13.15
	1.50	38.1	300#	2.00	50.8	FNPT	.50	12.7	1.38	35.1	.63	15.9	38.30	17.37
						150#	.50	12.7	1.38	35.1	.63	15.9	45.80	20.77
	1.50	38.1	600#	2.00	50.8	FNPT	.50	12.7	1.38	35.1	.63	15.9	38.30	17.37
						150#	.50	12.7	1.38	35.1	.63	15.9	45.80	20.77
19567M	1.50	38.1	900#	2.00	50.8	FNPT	.63	15.9	1.50	38.1	.63	15.9	46.80	21.23
						300#	.63	15.9	1.50	38.1	.63	15.9	56.30	25.54
	1.50	38.1	1500#	2.00	50.8	FNPT	.63	15.9	1.50	38.1	.63	15.9	46.80	21.23
						300#	.63	15.9	1.50	38.1	.63	15.9	56.30	25.54
	2.00	50.8	300#	2.50	63.5	FNPT	.63	15.9	1.50	38.1	.63	15.9	39.80	18.05
						150#	.63	15.9	1.50	38.1	.63	15.9	51.30	23.27
	2.00	50.8	600#	2.50	63.5	FNPT	.63	15.9	1.50	38.1	.63	15.9	40.80	18.51
						150#	.63	15.9	1.50	38.1	.63	15.9	52.30	23.72
	2.00	50.8	900#	2.50	63.5	FNPT	.63	15.9	1.63	41.4	.63	15.9	55.30	25.08
						300#	.63	15.9	1.63	41.4	.63	15.9	68.80	31.21
	2.00	50.8	1500#	2.50	63.5	FNPT	.63	15.9	1.63	41.4	.63	15.9	55.30	25.08
						300#	.63	15.9	1.63	41.4	.63	15.9	68.80	31.21

Dimensions & Weights (Contd.)

Flanged Connections (Contd.)

Flanged Connections (Standard Design)																	
Valve Type	Inlet			Outlet			A		B		C		D		E		
	Size		Type	Size		Type	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	
	in.	mm		in.	mm												
19096H	.75	19.1	1500#	1.00	25.4		FNPT	6.50	165.1	2.38	60.5	15.63	397.0	3.13	79.5	1.63	41.4
							300#	6.50	165.1	6.25	158.8	15.63	397.0	3.13	79.5		
19110H							FNPT	6.50	165.1	2.38	60.5	15.63	397.0	3.13	79.5	1.88	47.8
	.75	19.1	2500#	1.00	25.4		300#	6.50	165.1	6.25	158.8	15.63	397.0	3.13	79.5		
19126H							FNPT	6.50	165.1	3.13	79.5	19.06	484.1	4.63	117.6	1.63	41.4
	.75	19.1	1500#	1.00	25.4		300#	6.50	165.1	6.25	158.8	19.06	484.1	4.63	117.6		
							FNPT	6.50	165.1	3.13	79.5	19.06	484.1	4.63	117.6	1.88	47.8
	.75	19.1	2500#	1.00	25.4		300#	6.50	165.1	6.25	158.8	19.06	484.1	4.63	117.6		
19226H	1.00	25.4	1500#	1.50	38.1		FNPT	7.25	184.15	3.13	79.5	16.38	416.1	4.63	117.6	1.75	44.5
							300#	7.25	184.15	6.13	155.7	16.38	416.1	4.63	117.6		
							FNPT	7.25	184.15	3.13	79.5	16.38	416.1	4.63	117.6	2.00	50.8
	1.00	25.4	2500#	1.50	38.1		300#	7.25	184.15	6.13	155.7	16.38	416.1	4.63	117.6		

Flanged Connections (Standard Design)																
Valve Type	Inlet			Outlet			F		G		H		Approx. Weight			
	Size		Type	Size		Type	in	mm	in	mm	in	mm	lb	kg		
	in.	mm		in.	mm											
19096H							FNPT	.63	15.9	1.19	30.2	.50	12.7	18.50	8.39	
	.75	19.1	1500#	1.00	25.4		300#									
19110H							FNPT	.63	15.9	1.19	30.2	.50	12.7	23.00	10.43	
	.75	19.1	2500#	1.00	25.4		300#									
19126H							FNPT	.63	15.9	1.19	30.2	.50	12.7	20.80	9.43	
	.75	19.1	1500#	1.00	25.4		300#									
							FNPT	.63	15.9	1.19	30.2	.50	12.7	25.30	11.48	
	.75	19.1	2500#	1.00	25.4		300#									
19226H							FNPT	.63	15.9	1.19	30.2	.50	12.7	37.00	16.78	
	.75	19.1	1500#	1.00	25.4		300#									
							FNPT	.63	15.9	1.19	30.2	.50	12.7	41.50	18.82	
	.75	19.1	2500#	1.00	25.4		300#									
19226H							FNPT	.63	15.9	1.31	33.3	.50	12.7	39.00	17.69	
	1.00	25.4	1500#	1.50	38.1		300#									
							FNPT	.63	15.9	1.31	33.3	.50	12.7	43.50	19.73	
	1.00	25.4	2500#	1.50	38.1		300#									

Dimensions & Weights (Contd.)

Flanged Connections (Contd.)

Flanged Connections (Backpressure Design)																
Valve Type	Inlet			Outlet			A		B		C		D		E	
	Size		Type	Size		Type	in.	mm	in	mm	in	mm	in	mm	in	mm
	in.	mm		in.	mm											
19096M	.50	12.7	150#	1.00	25.4	FNPT 150#	6.00	152.4	2.00	50.8	15.63	397.0	3.75	95.3	.88	22.4
	.50	12.7	300#	1.00	25.4	FNPT 150#	6.00	152.4	2.00	50.8	15.63	397.0	3.75	95.3	1.00	25.4
	.50	12.7	600#	1.00	25.4	FNPT 150#	6.00	152.4	2.00	50.8	15.63	397.0	3.75	95.3	1.00	25.4
	.50	12.7	900#	1.00	25.4	FNPT 300#	6.50	165.1	2.00	50.8	16.13	409.7	3.75	95.3	1.50	38.1
	.50	12.7	1500#	1.00	25.4	FNPT 300#	6.50	165.1	2.00	50.8	16.13	409.7	3.75	95.3	1.50	38.1
	.75	19.1	150#	1.00	25.4	FNPT 150#	6.25	158.75	2.00	50.8	15.88	403.4	3.75	95.3	1.00	25.4
	.75	19.1	300#	1.00	25.4	FNPT 150#	6.25	158.75	2.00	50.8	15.88	403.4	3.75	95.3	1.13	28.7
	.75	19.1	600#	1.00	25.4	FNPT 150#	6.25	158.75	2.00	50.8	15.88	403.4	3.75	95.3	1.13	28.7
	.75	19.1	900#	1.00	25.4	FNPT 300#	6.75	171.45	2.00	50.8	16.38	416.1	3.75	95.3	1.63	41.4
	.75	19.1	1500#	1.00	25.4	FNPT 300#	6.75	171.45	2.00	50.8	16.38	416.1	3.75	95.3	1.63	41.4
19096L	1.00	25.4	150#	1.00	25.4	FNPT 150#	6.50	165.1	2.00	50.8	16.13	409.7	3.75	95.3	1.06	26.9
	1.00	25.4	300#	1.00	25.4	FNPT 150#	6.50	165.1	2.00	50.8	16.13	409.7	3.75	95.3	1.19	30.2
	1.00	25.4	600#	1.00	25.4	FNPT 150#	6.50	165.1	2.00	50.8	16.13	409.7	3.75	95.3	1.19	30.2
	1.00	25.4	900#	1.00	25.4	FNPT 300#	7.50	190.5	2.00	50.8	17.13	435.1	3.75	95.3	1.75	44.5
	1.00	25.4	1500#	1.00	25.4	FNPT 300#	7.50	190.5	2.00	50.8	17.13	435.1	3.75	95.3	1.75	44.5

Dimensions & Weights (Contd.)

Flanged Connections (Contd.)

Flanged Connections (Backpressure Design)														
Valve Type	Inlet			Outlet			F		G		H		Approx. Weight	
	Size		Type	Size		Type	in.	mm	in.	mm	in.	mm	lb.	kg
	in.	mm		in.	mm									
19096M	.50	12.7	150#	1.00	25.4	FNPT 150#	.438	11.1	1.06	26.9	.50	12.7	13.00	5.9
													16.00	7.3
	.50	12.7	300#	1.00	25.4	FNPT 150#	.438	11.1	1.06	26.9	.50	12.7	14.00	6.4
													17.00	7.7
	.50	12.7	600#	1.00	25.4	FNPT 150#	.438	11.1	1.06	26.9	.50	12.7	14.00	6.4
													17.00	7.7
	.50	12.7	900#	1.00	25.4	FNPT 300#	.625	15.9	1.19	30.2	.50	12.7	18.25	8.3
													22.75	10.3
	.50	12.7	1500#	1.00	25.4	FNPT 300#	.625	15.9	1.19	30.2	.50	12.7	18.25	8.3
													22.75	10.3
19096M	.75	19.1	150#	1.00	25.4	FNPT 150#	.500	12.7	1.06	26.9	.50	12.7	13.75	6.2
													16.75	7.6
	.75	19.1	300#	1.00	25.4	FNPT 150#	.500	12.7	1.06	26.9	.50	12.7	15.25	6.9
													18.25	8.3
	.75	19.1	600#	1.00	25.4	FNPT 150#	.500	12.7	1.06	26.9	.50	12.7	15.25	6.9
													18.25	8.3
	.75	19.1	900#	1.00	25.4	FNPT 300#	.625	15.9	1.19	30.2	.50	12.7	20.00	9.1
													23.00	10.4
	.75	19.1	1500#	1.00	25.4	FNPT 300#	.625	15.9	1.19	30.2	.50	12.7	20.00	9.1
													23.00	10.4
19096M	1.00	25.4	150#	1.00	25.4	FNPT 150#	.500	12.7	1.06	26.9	.50	12.7	14.50	6.6
													17.50	7.9
	1.00	25.4	300#	1.00	25.4	FNPT 150#	.500	12.7	1.06	26.9	.50	12.7	16.00	7.3
													19.00	8.6
	1.00	25.4	600#	1.00	25.4	FNPT 150#	.500	12.7	1.06	26.9	.50	12.7	16.00	7.3
													19.00	8.6
	1.00	25.4	900#	1.00	25.4	FNPT 300#	.625	15.9	1.19	30.2	.50	12.7	22.00	10.0
													25.00	11.3
	1.00	25.4	1500#	1.00	25.4	FNPT 300#	.625	15.9	1.19	30.2	.50	12.7	22.00	10.0
													25.00	11.3

Pressure / Temperature

General Information

19000 & 19096MBP Series

These ratings apply to threaded or socket weld end connections.

When the valves are supplied with flanged connections the flange ratings may govern the range of valve pressure/temperature rating.

When selecting valves for back pressure applications the following limits apply:

- Constant back pressure - 400 psig (27.58 barg).
- Variable back pressure (superimposed or built-up) - 400 psig (27.58 barg) or 10% of set pressure whichever is smaller.

Valves with set pressures less than 15 psig (1.03 barg) cannot be stamped with the ASME Code stamp.

Notes:

1. When soft seats are used Elastometer material may govern the valve pressure/temperature rating.

19000 & 19096MBP Series




Pressure / Temperature (Contd.)

Pressure Temperature Ratings of 19000 Series Valves												
Valve Type	-425 °F (-253.9 °C)		-75 °F (- 59.4°C)		100 °F (37.8°C)		200 °F (93.3°C)		300 °F (148.9°C)		400 °F (204.4°C)	
	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
19096L	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99
19110L	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99
19126L	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99
19226L	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99
19357L	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99
19567L	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99
19096M	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89
19110M	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89
19126M	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89
19226M	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89
19357M	1500	103.42	1500	103.42	1500	103.42	1420	97.90	1340	92.38	1260	86.87
19567M	1000	68.94	1000	68.94	1000	68.94	960	66.18	920	63.43	880	60.67
19096H	5000	344.73	5000	344.73	5000	344.73	4811	331.70	4621	318.60	4432	305.57
19110H	5000	344.73	5000	344.73	5000	344.73	4811	331.70	4621	318.60	4432	305.57
19126H	8000	551.58	8000	551.58	8000	551.58	7785	536.75	7571	522.00	7357	507.24
19226H	6400	441.26	6400	441.26	6400	441.26	6107	421.06	5814	400.86	5521	380.65

Pressure Temperature Ratings of 19000 Series Valves														
Valve Type	500 °F (260.°C)		600 °F (315.6°C)		700 °F (371.1°C)		800 °F (426.7°C)		900 °F (482.2°C)		1000 °F (537.8°C)		1100 °F (593.3°C)	
	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
19096L	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99
19110L	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99
19126L	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99
19226L	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99
19357L	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99
19567L	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99	290	19.99
19096M	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89
19110M	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89
19126M	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89
19226M	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89	2000	137.89
19357M	1180	81.35	1100	75.84	1020	70.32	940	64.81	860	59.29	780	53.77	700	48.26
19567M	840	57.91	800	55.15	760	52.40	720	49.64	680	46.88	640	44.12	600	41.36
19096H	4243	292.54	4054	279.51	3864	266.41	3675	253.38	-	-	-	-	-	-
19110H	4243	292.54	4054	279.51	3864	266.41	3675	253.38	-	-	-	-	-	-
19126H	7142	492.42	6928	477.66	6714	462.91	6500	448.15	-	-	-	-	-	-
19226H	5228	360.45	4935	340.25	4642	320.05	4350	299.92	-	-	-	-	-	-

Pressure / Temperature (Contd.)

Pressure / Temperature Rating of 19000 Series Valves

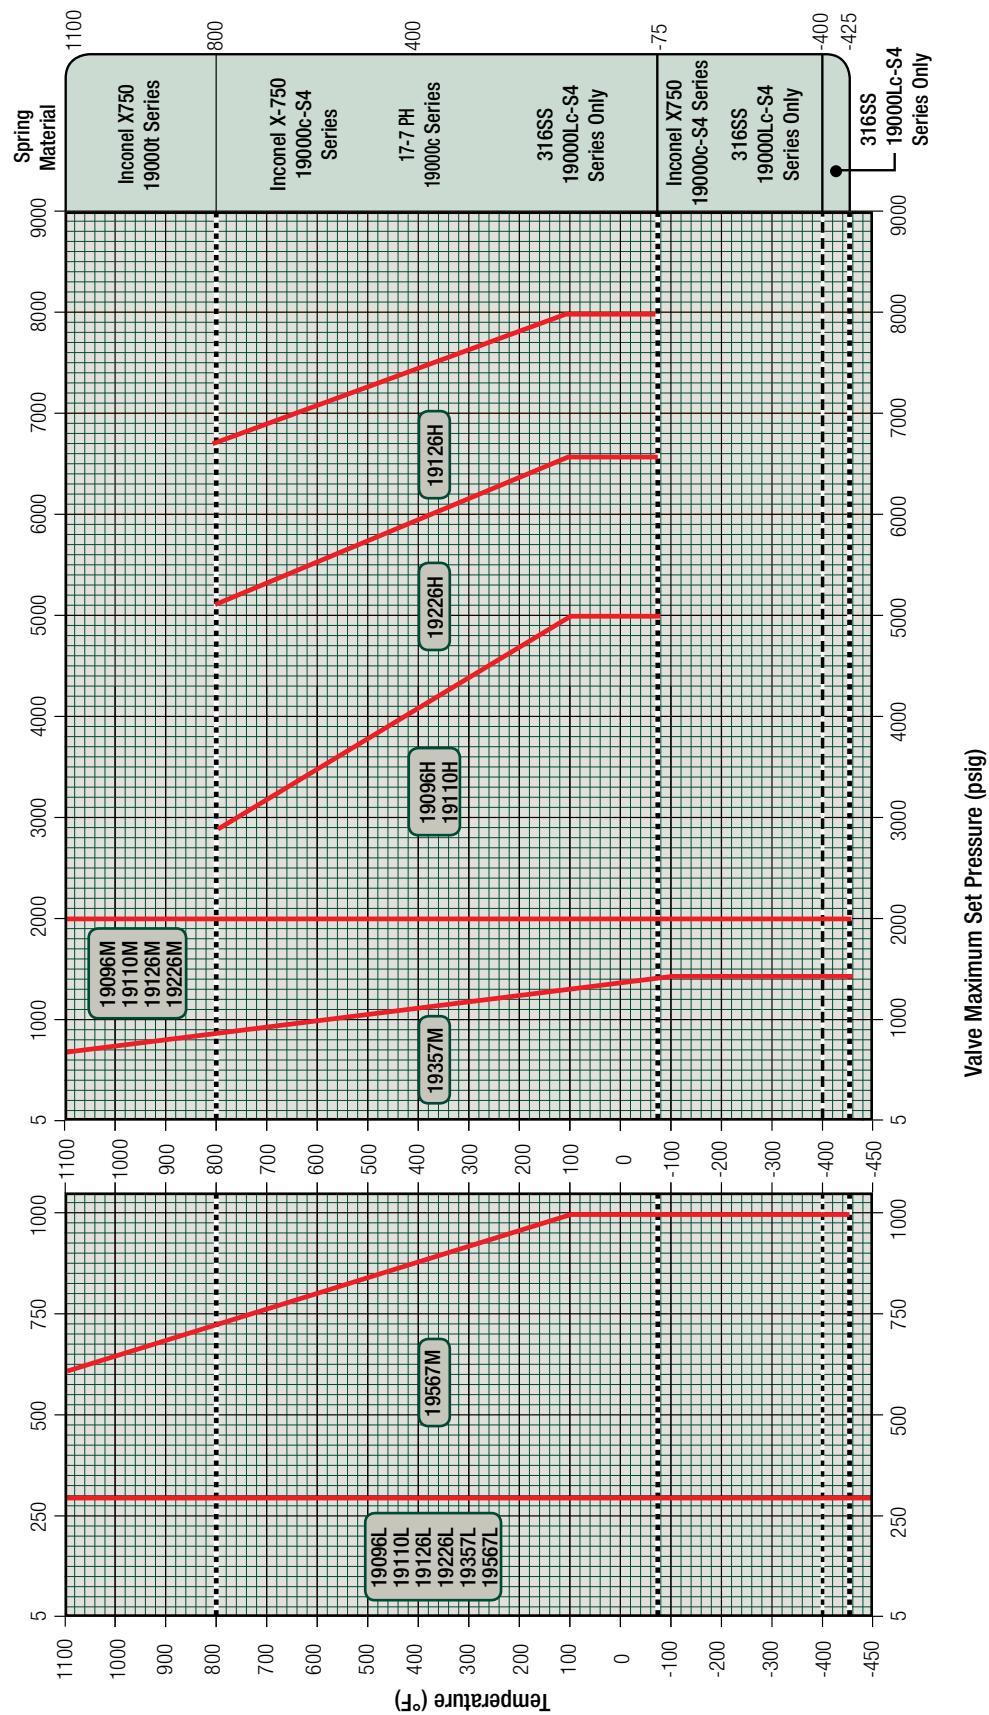

Capacities

Valve Capacity for ASME B&PV Code Section VIII, for Air¹

based at 10% overpressure or 3 psig (0.21 barg), whichever is greater, showing 90% of actual capacity in accordance with latest ASME Code requirements. Units of ft³/min (m³/min) of air are at a temperature of 60°F (15.6°C).

Orifice		19096 ²		19110		19126		19226		19357		19567	
Orifice Area		in ²	cm ²										
Set Pressure		Orifice Capacity											
psig	barg	ft ³ /min	m ³ /min										
15	1.03	50	1.41	57	1.61	66	1.86	119	3.36	188	5.32	298	8.43
20	1.37	58	1.64	66	1.86	76	2.15	137	3.87	216	6.11	344	9.74
30	2.06	73	2.06	84	2.37	96	2.71	173	4.89	274	7.75	435	12.31
40	2.75	90	2.54	104	2.94	119	3.36	213	6.03	337	9.54	536	15.17
50	3.44	107	3.02	123	3.48	141	3.99	253	7.16	400	11.32	636	18.00
60	4.13	124	3.51	143	4.04	163	4.61	293	8.29	464	13.13	737	20.86
70	4.82	141	3.99	162	4.58	186	5.26	333	9.42	527	14.92	837	23.70
80	5.51	158	4.47	182	5.15	208	5.88	374	10.59	590	16.70	938	26.56
90	6.20	175	4.95	201	5.69	230	6.51	414	11.72	654	18.51	1038	29.39
100	6.89	192	5.43	221	6.25	253	7.16	454	12.85	717	20.30	1139	32.25
120	8.27	226	6.39	260	7.36	297	8.41	534	15.12	843	23.87	1340	37.94
140	9.65	260	7.36	299	8.46	342	9.68	614	17.38	970	27.46	1541	43.63
160	11.03	295	8.35	338	9.57	387	10.95	694	19.65	1097	31.06	1742	49.32
180	12.41	329	9.31	377	10.67	431	12.20	774	21.91	1223	34.63	1943	55.01
200	13.78	363	10.27	416	11.77	476	13.47	854	24.18	1350	38.22	2144	60.71
220	15.16	397	11.24	455	12.88	521	14.75	934	26.44	1476	41.79	2345	66.40
240	16.54	431	12.20	494	13.98	565	15.99	1015	28.74	1603	45.39	2546	72.09
260	17.92	465	13.16	533	15.09	610	17.27	1095	31.00	1729	48.95	2747	77.78
280	19.30	499	14.13	572	16.19	655	18.54	1175	33.27	1856	52.55	2948	83.47
300	20.68	533	15.09	611	17.30	699	19.79	1255	35.53	1983	56.15	3149	89.16
320	22.06	567	16.05	650	18.40	744	21.06	1335	37.80	2109	59.72	3350	94.86
340	23.44	601	17.01	689	19.51	789	22.34	1415	40.06	2236	63.31	3551	100.55
360	24.82	635	17.98	728	20.61	833	23.58	1495	42.33	2362	66.88	3752	106.24
380	26.20	669	18.94	767	21.71	878	24.86	1575	44.59	2489	70.48	3953	111.93
400	27.57	703	19.90	806	22.82	923	26.13	1656	46.89	2615	74.04	4154	117.62
420	28.95	737	20.86	845	23.92	967	27.38	1736	49.15	2742	77.64	4355	123.31
440	30.33	771	21.83	884	25.03	1012	28.65	1816	51.42	2869	81.24	4556	129.01
460	31.71	805	22.79	923	26.13	1057	29.93	1896	53.68	2995	84.80	4757	134.70
480	33.09	839	23.75	962	27.24	1101	31.17	1976	55.95	3122	88.40	4958	140.39
500	34.47	873	24.72	1001	28.34	1146	32.45	2056	58.21	3248	91.97	5159	146.08

Notes:

- 1. Valves may be sized for either ASME or API applications.
- 2. 19096M-BP set pressure range is 50 to 2000 psig (3.45 to 137.90 barg).

Capacities (Contd.)

Valve Capacity for ASME B&PV Code Section VIII, for Air ¹ based at 10% overpressure or 3 psig (0.21 barg), whichever is greater, showing 90% of actual capacity in accordance with latest ASME Code requirements. Units of ft ³ /min (m ³ /min) of air are at a temperature of 60°F (15.6°C).													
Orifice		19096 ²		19110		19126		19226		19357		19567	
Orifice Area		in ²	cm ²										
Set Pressure		Orifice Capacity											
psig	barg	ft ³ /min	m ³ /min										
600	41.36	1043	29.53	1196	33.86	1370	38.79	2457	69.57	3881	109.89	6165	174.57
700	48.26	1213	34.34	1391	39.38	1593	45.10	2857	80.90	4514	127.82	7170	203.03
750	51.71	1299	36.78	1488	42.13	1705	48.28	3058	86.59	4830	136.77	7672	217.24
800	55.15	1384	39.19	1586	44.91	1816	51.42	3258	92.25	5147	145.74	8175	231.49
900	62.05	1554	44.00	1781	50.43	2040	57.76	3659	103.61	5780	163.67	9180	259.94
1000	68.94	1724	48.81	1976	55.95	2263	64.08	4059	114.93	6413	181.59	10185	288.40
1100	75.84	1894	53.63	2171	61.47	2486	70.39	4460	126.29	7045	199.49	-	-
1200	82.73	2064	58.44	2366	66.99	2710	76.73	4861	137.64	7678	217.41	-	-
1300	89.63	2235	63.28	2561	72.51	2933	83.05	5261	148.97	8311	235.34	-	-
1400	96.52	2405	68.10	2756	78.04	3156	89.36	5662	160.33	8944	253.26	-	-
1500	103.42	2575	72.91	2951	83.56	3380	95.71	6062	171.65	9577	271.19	-	-
1600	110.31	2745	77.72	3146	89.08	3603	102.02	6463	183.01	-	-	-	-
1700	117.21	2915	82.54	3341	94.60	3826	108.34	6864	194.36	-	-	-	-
1800	124.10	3085	87.35	3535	100.10	4050	114.68	7264	205.69	-	-	-	-
1900	131.00	3256	92.19	3730	105.62	4273	120.99	7665	217.04	-	-	-	-
2000	137.89	3426	97.01	3925	111.14	4497	127.34	8066	228.40	-	-	-	-
2500	172.36	4277	121.11	4900	138.75	5613	158.94	10069	285.12	-	-	-	-
3000	206.84	5128	145.20	5875	166.36	6730	190.57	12072	341.84	-	-	-	-
3500	241.31	5979	169.30	6850	193.97	7847	222.20	14075	398.55	-	-	-	-
4000	275.79	6829	193.37	7825	221.57	8964	253.83	16078	455.27	-	-	-	-
4500	310.26	7680	217.47	8800	249.18	10081	285.46	18081	511.99	-	-	-	-
5000	344.73	8531	241.57	9775	276.79	11197	317.06	20085	568.74	-	-	-	-
5500	379.21	-	-	-	-	12314	348.69	22088	625.46	-	-	-	-
6000	413.68	-	-	-	-	13431	380.32	24091	682.18	-	-	-	-
6400	441.26	-	-	-	-	14324	405.61	25693	727.54	-	-	-	-
6500	448.15	-	-	-	-	14548	411.95	-	-	-	-	-	-
7000	482.63	-	-	-	-	15665	443.58	-	-	-	-	-	-
7500	517.10	-	-	-	-	16781	475.18	-	-	-	-	-	-
8000	551.58	-	-	-	-	17898	506.81	-	-	-	-	-	-

Notes:

1. Valves may be sized for either ASME or API applications.
2. 19096M-BP set pressure range is 50 to 2000 psig (3.45 to 137.90 barg).

Capacities (Contd.)

Valve Capacity for ASME B&PV Code Section VIII, for Saturated Steam¹
based at 10% overpressure or 3 psig (0.21 barg), whichever is greater, showing 90% of
actual capacity in accordance with latest ASME Code requirements.

Orifice		19096 ²		19110		19126		19226		19357		19567	
Orifice Area		in ²	cm ²	in ²	cm ²	in ²	cm ²	in ²	cm ²	in ²	cm ²	in ²	cm ²
Set Pressure		Orifice Capacity											
psig	barg	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr
15	1.03	141	63	162	73	186	84	334	151	527	239	838	380
20	1.37	163	73	187	84	214	97	385	174	608	275	966	438
30	2.06	207	93	237	107	271	122	487	220	769	348	1222	554
40	2.75	254	115	291	131	334	151	599	271	947	429	1504	682
50	3.44	302	136	346	156	397	180	712	322	1125	510	1786	810
60	4.13	350	158	401	181	459	208	824	373	1302	590	2068	938
70	4.82	398	180	456	206	522	236	937	425	1480	671	2351	1066
80	5.51	445	201	510	231	585	265	1049	475	1657	751	2633	1194
90	6.20	493	223	565	256	647	293	1161	526	1835	832	2915	1322
100	6.89	541	245	620	281	710	322	1274	577	2012	912	3197	1450
120	8.27	636	288	729	330	835	378	1499	679	2368	1074	3761	1705
140	9.65	732	332	839	380	961	435	1723	781	2723	1235	4325	1961
160	11.03	827	375	948	430	1086	492	1948	883	3078	1396	4889	2217
180	12.41	923	418	1057	479	1211	549	2173	985	3433	1557	5453	2473
200	13.78	1018	461	1167	529	1337	606	2398	1087	3788	1718	6017	2729
220	15.16	1114	505	1276	578	1462	663	2623	1189	4143	1879	6581	2985
240	16.54	1209	548	1386	628	1587	719	2848	1291	4498	2040	7145	3240
260	17.92	1305	591	1495	678	1713	777	3072	1393	4854	2201	7709	3496
280	19.30	1400	635	1605	728	1838	833	3297	1495	5209	2362	8273	3752
300	20.68	1496	678	1714	777	1963	890	3522	1597	5564	2523	8837	4008
320	22.06	1591	721	1823	826	2089	947	3747	1699	5919	2684	9401	4264
340	23.44	1687	765	1933	876	2214	1004	3972	1801	6274	2845	9965	4520
360	24.82	1782	808	2042	926	2339	1060	4196	1903	6629	3006	10529	4775
380	26.20	1878	851	2152	976	2465	1118	4421	2005	6984	3167	11093	5031
400	27.57	1973	894	2261	1025	2590	1174	4646	2107	7339	3328	11657	5287
420	28.95	2069	938	2371	1075	2715	1231	4871	2209	7695	3490	12221	5543
440	30.33	2164	981	2480	1124	2841	1288	5096	2311	8050	3651	12785	5799
460	31.71	2260	1025	2589	1174	2966	1345	5321	2413	8405	3812	13349	6055
480	33.09	2355	1068	2699	1224	3091	1402	5545	2515	8760	3973	13913	6310
500	34.47	2451	1111	2808	1273	3217	1459	5770	2617	9115	4134	14477	6566
600	41.36	2928	1328	3355	1521	3843	1743	6894	3127	10891	4940	17297	7845
700	48.26	3406	1544	3902	1769	4470	2027	8018	3636	12666	5745	20118	9125
750	51.71	3644	1652	4176	1894	4784	2169	8580	3891	13554	6147	21528	9764
800	55.15	3883	1761	4450	2018	5097	2311	9142	4146	14442	6550	22938	10404
900	62.05	4361	1978	4997	2266	5724	2596	10267	4657	16218	7356	25758	11683
1000	68.94	4838	2194	5544	2514	6350	2880	11391	5166	17994	8161	28578	12962
1100	75.84	5316	2411	6091	2762	6977	3164	12515	5676	19769	8967	-	-
1200	82.73	5793	2627	6638	3010	7604	3449	13639	6186	21545	9772	-	-
1300	89.63	6271	2844	7185	3259	8230	3733	14763	6696	23321	10578	-	-
1400	96.52	6748	3060	7732	3507	8857	4017	15887	7206	25096	11383	-	-
1423 ³	98.11	6858	3110	7858	3564	9001	4082	16146	7323	25505	11568	-	-
1500	103.42	7260	3293	8319	3773	9529	4322	17093	7753	27001	12247	-	-
1600	110.31	7792	3534	8928	4049	10227	4638	18343	8320	-	-	-	-
1700	117.21	8333	3779	9549	4331	10938	4961	19619	8899	-	-	-	-
1800	124.10	8888	4031	10184	4619	11665	5291	20923	9490	-	-	-	-
1900	131.00	9455	4288	10834	4914	12410	5629	22260	10096	-	-	-	-
2000	137.89	10039	4553	11503	5217	13176	5976	23633	10719	-	-	-	-
2500	172.36	13285	6025	15222	6904	17436	7908	31275	14186	-	-	-	-
2903 ⁴	200.15	16611	7534	19033	8633	21802	9889	39106	17738	-	-	-	-

Notes:

1. Valves may be sized for either ASME or API applications.
2. 19096M-BP set pressure range is 50 to 2000 psig (3.45 to 137.9 barg).
3. The following Napier Factor is applied to the capacity of pressures greater than 1423 psig (98.11 barg):
$$\frac{0.1906 \times P_{\text{psia}} - 1000}{0.2292 \times P_{\text{psia}} - 1061}$$
4. Maximum permissible set pressure on steam is 2903 psig (200.15). Value has been interpolated.


Capacities (Contd.)

Valve Capacity for ASME B&PV Code Section VIII, for Water ¹														
Orifice		19096 ²		19110		19126		19226		19357		19567		
Orifice Area		in ²	cm ²	in ²	cm ²	in ²	cm ²	in ²	cm ²	in ²	cm ²	in ²	cm ²	
Set Pressure		Orifice Capacity												
psig	barg	gal/min	L/min	gal/min	L/min	gal/min	L/min	gal/min	L/min	gal/min	L/min	gal/min	L/min	
15	1.03	10	38	11	42	13	49	24	91	38	144	61	231	
20	1.37	11	42	13	49	15	57	27	102	43	163	69	261	
30	2.06	14	53	16	61	18	68	33	125	52	197	83	314	
40	2.75	16	61	18	68	21	79	38	144	60	227	96	363	
50	3.44	18	68	20	76	23	87	42	159	67	254	107	405	
60	4.13	19	72	22	83	26	98	46	174	74	280	117	443	
70	4.82	21	79	24	91	28	106	50	189	80	303	127	481	
80	5.51	23	87	26	98	30	114	54	204	85	322	136	515	
90	6.20	24	91	27	102	32	121	57	216	90	341	144	545	
100	6.89	25	95	29	110	33	125	60	227	95	360	152	575	
120	8.27	28	106	32	121	37	140	66	250	104	394	166	628	
140	9.65	30	114	34	129	39	148	71	269	113	428	179	678	
160	11.03	32	121	37	140	42	159	76	288	121	458	192	727	
180	12.41	34	129	39	148	45	170	81	307	128	485	204	772	
200	13.78	36	136	41	155	47	178	85	322	135	511	215	814	
220	15.16	38	144	43	163	50	189	89	337	142	538	225	852	
240	16.54	39	148	45	170	52	197	93	352	148	560	235	890	
260	17.92	41	155	47	178	54	204	97	367	154	583	245	927	
280	19.30	43	163	49	185	56	212	101	382	160	606	254	961	
300	20.68	44	167	41	155	58	220	104	394	165	625	263	996	
320	22.06	46	174	42	159	60	227	108	409	171	647	272	1030	
340	23.44	47	178	43	163	62	235	111	420	176	666	280	1060	
360	24.82	48	182	45	170	64	242	115	435	181	685	288	1090	
380	26.20	50	189	46	174	65	246	118	447	186	704	296	1120	
400	27.57	51	193	47	178	67	254	121	458	191	723	304	1151	
420	28.95	52	197	48	182	69	261	124	469	196	742	311	1177	
440	30.33	54	204	49	185	70	265	127	481	200	757	319	1208	
460	31.71	55	208	50	189	72	273	130	492	205	776	326	1234	
480	33.09	56	212	52	197	74	280	132	500	209	791	333	1261	
500	34.47	57	216	53	201	75	284	135	511	214	810	340	1287	
600	41.36	63	238	58	220	82	310	148	560	234	886	372	1408	
700	48.26	68	257	62	235	89	337	160	606	253	958	402	1522	
750	51.71	70	265	65	246	92	348	166	628	262	992	416	1575	
800	55.15	72	273	67	254	95	360	171	647	270	1022	430	1628	
900	62.05	77	291	71	269	101	382	181	685	287	1086	456	1726	
1000	68.94	81	307	75	284	106	401	191	723	302	1143	480	1817	
1100	75.84	85	322	78	295	112	424	201	761	317	1200	-	-	
1200	82.73	89	337	82	310	117	443	209	791	331	1253	-	-	
1300	89.63	92	348	85	322	121	458	218	825	345	1306	-	-	
1400	96.52	96	363	88	333	126	477	226	856	358	1355	-	-	
1500	103.42	99	375	92	348	130	492	234	886	370	1401	-	-	
1600	110.31	102	386	95	360	135	511	242	916	-	-	-	-	
1700	117.21	106	401	97	367	139	526	249	943	-	-	-	-	
1800	124.10	109	413	100	379	143	541	257	973	-	-	-	-	
1900	131.00	112	424	103	390	147	556	264	999	-	-	-	-	
2000	137.89	115	435	106	401	151	572	271	1026	-	-	-	-	
2500	172.36	128	485	118	447	168	636	303	1147	-	-	-	-	
3000	206.84	141	534	130	492	185	700	332	1257	-	-	-	-	
3500	241.31	152	575	140	530	199	753	358	1355	-	-	-	-	
4000	275.79	162	613	150	568	213	806	383	1450	-	-	-	-	
4500	310.26	172	651	159	602	226	856	406	1537	-	-	-	-	
5000	344.73	182	689	168	636	238	901	428	1620	-	-	-	-	
5500	379.21	-	-	-	250	946	449	1700	-	-	-	-	-	
6000	413.68	-	-	-	261	988	469	1775	-	-	-	-	-	
6400	441.26	-	-	-	270	1022	484	1832	-	-	-	-	-	
6500	448.15	-	-	-	272	1030	-	-	-	-	-	-	-	
7000	482.63	-	-	-	282	1067	-	-	-	-	-	-	-	
7500	517.10	-	-	-	292	1105	-	-	-	-	-	-	-	
8000	551.58	-	-	-	302	1143	-	-	-	-	-	-	-	

Notes:

1. Valves may be sized for either ASME or API applications.
2. 19096M-BP set pressure range is 50 to 2000 psig (3.45 to 137.90 barg).

Valve Configuration Code

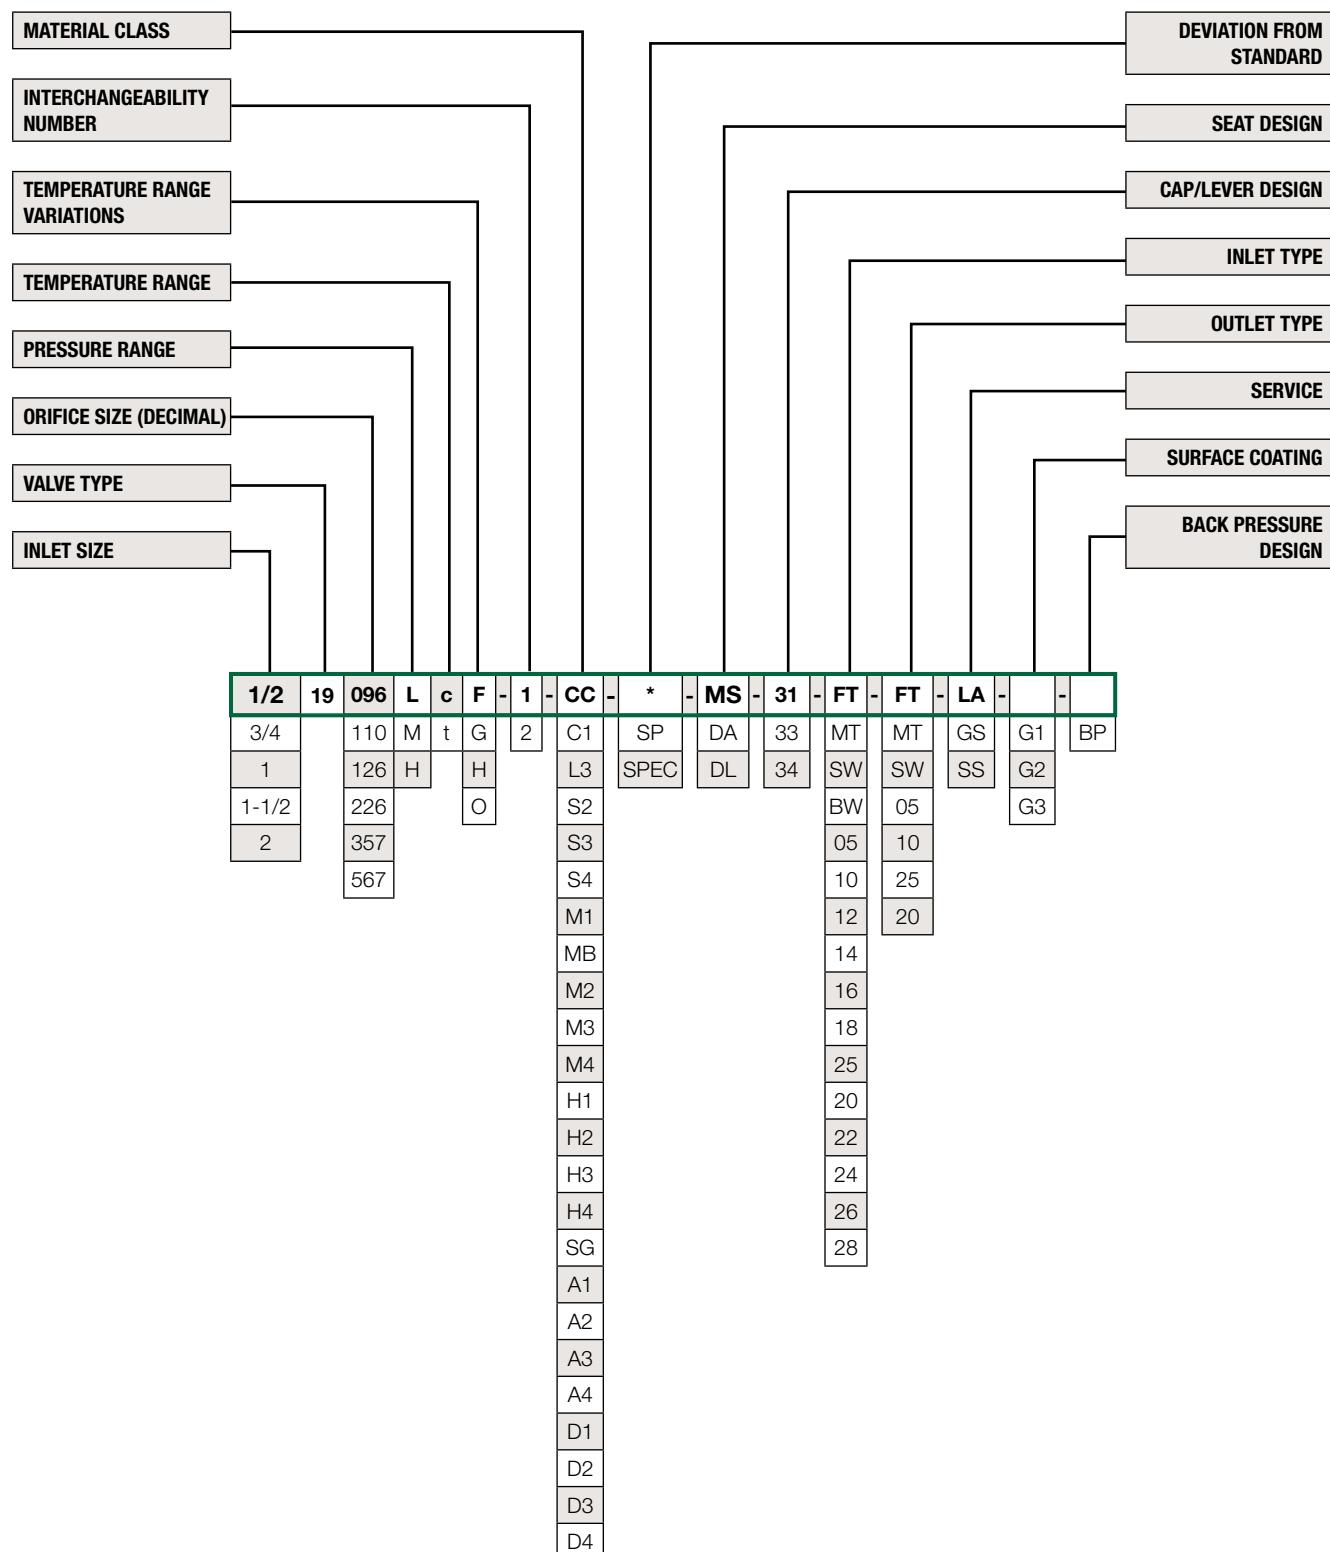

Valve Configuration Code (Contd.)

Orifice Area		
Designation	Area	
	in ²	cm ²
096	0.096	0.619
110	0.110	0.710
126	0.126	0.813
226	0.226	1.458
357	0.357	2.303
567	0.567	3.658

Backpressure Design	
Designation	Description
BP	Medium Pressure [50 - 2000 psig (3.45-137.90 barg)] Maximum B/P 400 psig (27.58 barg)

Temperature Class	
Designation	Class
c	≤ 800°F (427°C)
t	> 800°F (427°C)

Service	
Designation	Description
GS	Gas, Air
LA	Liquid
SS	Steam

Cap/Lever Design	
Designation	Description
31	Screwed
33	Packed
34	Plain

Pressure Range				
Designation	Range			
	min.		max.	
	psig	barg	psig	barg
L	5	0.34	290	19.99
M	291	20.06	2000	137.90
H	2001	137.96	8000	551.58

Material Class Variations	
Designation	Variation
CC	Standard Material
C1	Ambient Temp. to -50°F (-45.6°C) [LCC Construction]
L3	Low Temperature Service [-151 to -450°F (-102 to -268°C)]
S2	Stainless Steel [Internals, Except Spring Assy.]
S3	Stainless Steel [All Except Spring Assy.]
S4	Stainless Steel [Complete Valve]
M1	Monel [Base & Disc]
MB	Monel [M1+Disc Holder]
M2	Monel [Internals, Except Spring Assy.]
M3	Monel [All Except Spring Assy.]
M4	Monel [Complete Valve]
H1	Hastelloy [Base & Disc]
H2	Hastelloy [Internals, Except Spring Assy.]
H3	Hastelloy [All Except Spring Assy.]
H4	Hastelloy [Complete Valve]
SG	Sour Gas
A1	Alloy 20 [Base & Disc]
A2	Alloy 20 [Internals, Except Spring Assy.]
A3	Alloy 20 [All Except Spring Assy.]
A4	Alloy 20 [Complete Valve]
D1	Duplex [Base & Disc]
D2	Duplex [Internals, Except Spring Assy.]
D3	Duplex [All Except Spring Assy.]
D4	Duplex [Complete Valve]

Surface Coating	
Designation	Description
G1	Glide Aloy Disc Holder
G2	Glide Aloy Guide
G3	Guide Aloy Disc Holder and Guide

Seat Type	
Designation	Description
MS	Metal Seat
DA	Soft Seat
DL	Soft Seat Liquid Service Pressures ≤ 100 psig (6.89 barg) (Except 110 Orifice)

Valve Configuration Code (Contd.)

Inlet Connection Type	
Designation	Variation
FT	Female NPT
MT	Male NPT
SW	Socket Weld
BW	Buttweld
05	150# Flanged Raised Face
10	300# Flanged Raised Face
12	600# Flanged Raised Face
14	900# Flanged Raised Face
16	1500# Flanged Raised Face
18	2500# Flanged Raised Face
25	150# Flanged Ring Joint
20	300# Flanged Ring Joint
22	600# Flanged Ring Joint
24	900# Flanged Ring Joint
26	1500# Flanged Ring Joint
28	2500# Flanged Ring Joint

Outlet Connection Type	
Designation	Variation
FT	Female NPT
MT	Male NPT
SW	Socket Weld
05	150# Flanged Raised Face
10	300# Flanged Raised Face
25	150# Flanged Ring Joint
20	300# Flanged Ring Joint

Interchangeability	
Designation	Valve Type
1	Existing Soft Seat (DA & DL) Previous Metal Seat (MS)
2	Existing Metal Seat (MS)

How to Order a 19000 Safety Relief Valve

Specification Sheet			
		Page _____ of _____	
Requisition No. _____		Job No. _____	
Date _____		Revised By _____	
General			
1. Item Number:			
2. Tag Number:			
3. Service, Line or Equipment No:			
4. Number Required:			
Basis of Selection			
5. Code:			
<input type="checkbox"/> ASME Sec. III			
<input type="checkbox"/> ASME Sec. VIII			
<input type="checkbox"/> OTHER Specify:			
6. <input type="checkbox"/> Fire <input type="checkbox"/> OTHER Specify:			
7. Rupture Disk: <input type="checkbox"/> YES <input type="checkbox"/> NO			
Valve Design			
8. Type: Safety Relief			
9. Design:			
<input type="checkbox"/> Metal Seat <input type="checkbox"/> Resilient Seat			
<input type="checkbox"/> API 527 Seat Tightness			
<input type="checkbox"/> OTHER Specify:			
Connections			
10. Flanged			
Inlet Size:	Rating:	Facing:	
Outlet Size:	Rating:	Facing:	
11. Threaded			
Inlet:	<input type="checkbox"/> MNPT	<input type="checkbox"/> FNPT	
Outlet:	<input type="checkbox"/> MNPT	<input type="checkbox"/> FNPT	
12. <input type="checkbox"/> OTHER Specify:			
Materials			
13. Base:			
14. Bonnet:			
15. Guide/Rings:			
16. Seat Material:			
<input type="checkbox"/> Metal:			
<input type="checkbox"/> Resilient:			
17. Spring:			
18. Comply with NACE MRO 175 <input type="checkbox"/> YES <input type="checkbox"/> NO			
19. <input type="checkbox"/> OTHER Specify:			
20. Cap and Lever Selection			
<input type="checkbox"/> Screwed Cap (Standard) <input type="checkbox"/> Bolted Cap			
<input type="checkbox"/> Plain Lever <input type="checkbox"/> Packed Lever <input type="checkbox"/> Gag			
21. <input type="checkbox"/> OTHER Specify:			
Service Conditions			
22. Fluid and State:			
23. Required Capacity per Valve & Units:			
24. Molecular Weight or Specific Gravity:			
25. Viscosity at Flowing Temperature & Units:			
26. Operating Pressure & Units:			
27. Blowdown: <input type="checkbox"/> Standard <input type="checkbox"/> Other			
28. Latent Heat of Vaporization & Units:			
29. Operating Temperature & Units:			
30. Relieving Temperature & Units:			
31. Built-up Back Pressure & Units:			
32. Superimposed Back Pressure & Units:			
33. Cold differential Test Pressure & Units:			
34. Allowable Overpressure in Percent or Units:			
35. Compressibility Factor, Z:			
36. Ratio of Specific Heats:			
Sizing and Selection			
37. Calculated Orifice Area: _____ in ² _____ cm ²			
38. Selected Orifice Area: _____ in ² _____ cm ²			
39. Orifice Designation (letter):			
40. Manufacturer:			
41. Model Number:			
42. Vendor Calculations Required: <input type="checkbox"/> YES <input type="checkbox"/> NO			

